

Relationship Between Allowable Load at Tip & Running Service Life







The greater the load at the guide tip, the shorter the running service life. Select the appropriate model, considering balance between load and service life.






Single-guide

Single-guide type
 Double-guide type

<Vertical> <Horizontal>

* The single-guide specification can only be used with vertical loads.

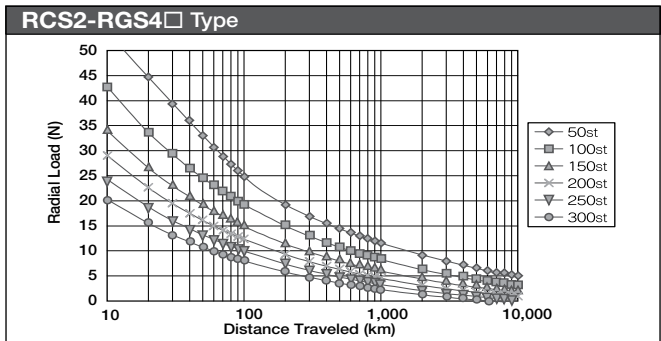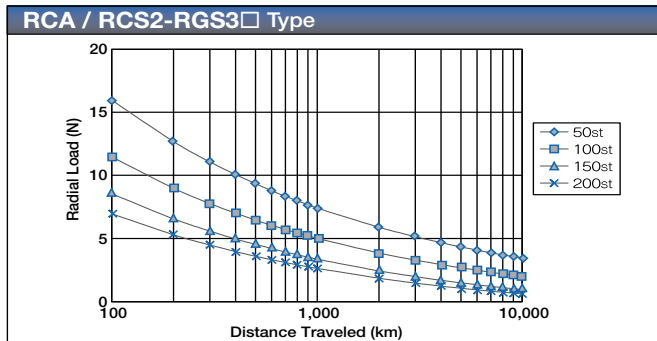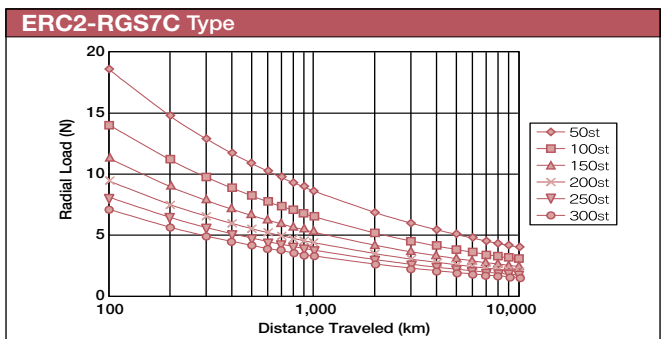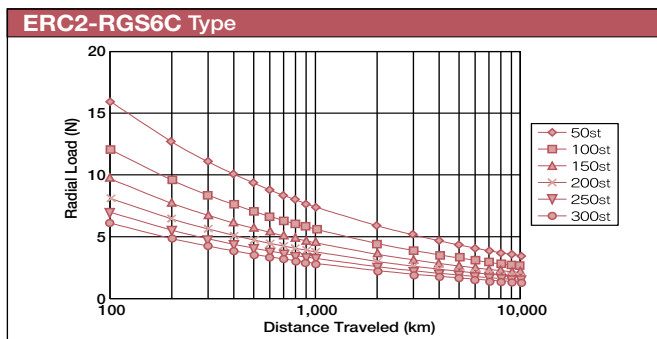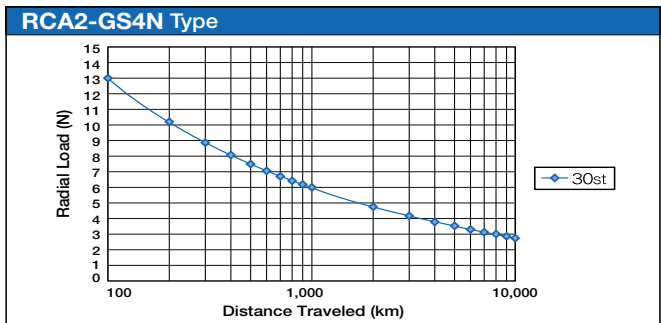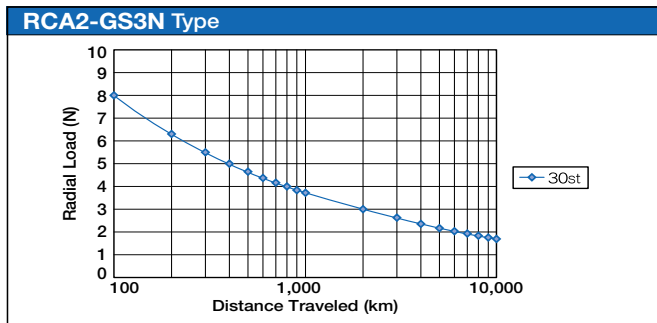

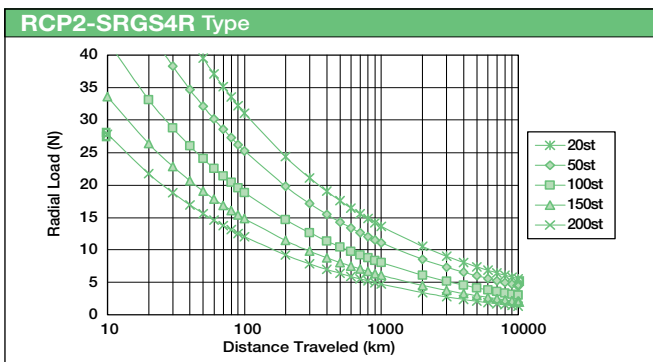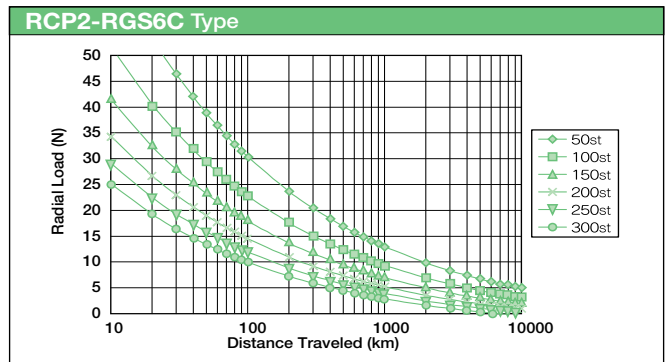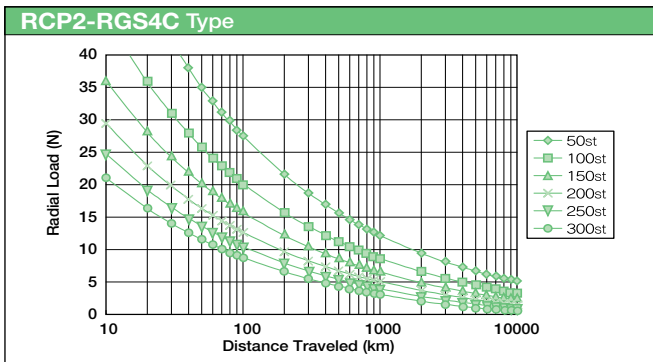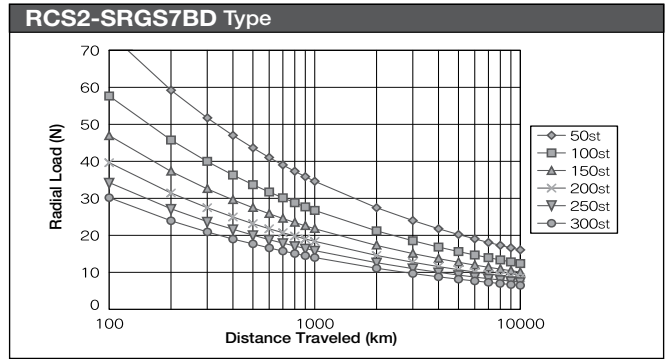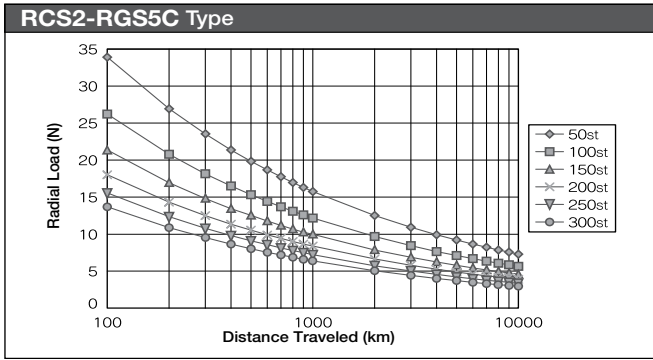

Double-guide

