




Dimensions

CAD drawings can be downloaded from IAI website. [www.intelligentactuator.com](http://www.intelligentactuator.com)

For Special Orders P. A-9



- \*1 A motor-encoder cable is connected here. See page A-39 for details on cables.
- \*2 When homing, the slider moves to the ME; therefore, please watch for any interference with the surrounding objects.  
ME: Mechanical end SE: Stroke end
- \*3 Reference position for calculating the moment Ma.

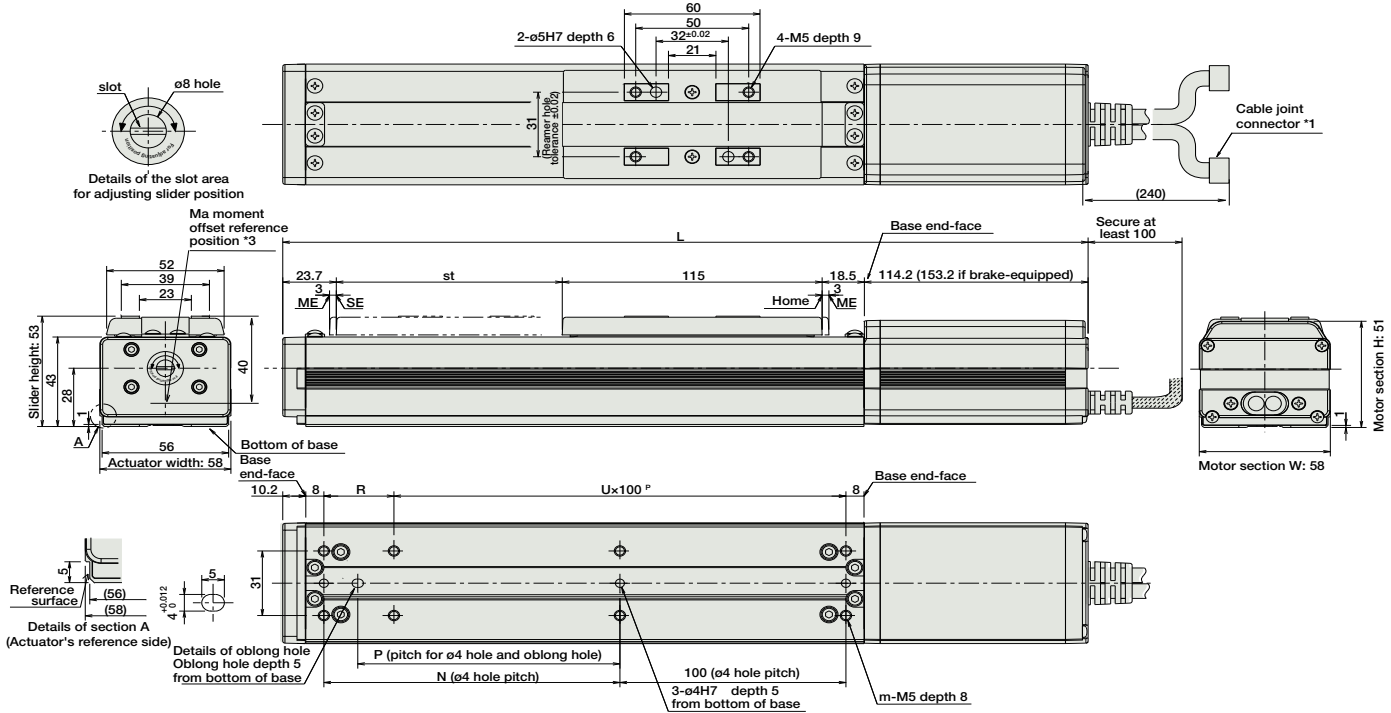

■ Dimensions/Weight by Stroke

\* Brake-equipped models are heavier by 0.3kg.

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L No Brake	321.4	371.4	421.4	471.4	521.4	571.4	621.4	671.4	721.4	771.4	821.4	871.4
L With Brake	360.4	410.4	460.4	510.4	560.4	610.4	660.4	710.4	760.4	810.4	860.4	910.4
N	81	131	181	231	281	331	381	431	481	531	581	631
P	66	116	166	216	266	316	366	416	466	516	566	616
R	81	31	81	31	81	31	81	31	81	31	81	31
U	1	2	2	3	3	4	4	5	5	6	6	7
m	6	8	8	10	10	12	12	14	14	16	16	18
Weight (kg)	1.4	1.6	1.8	2	2.2	2.4	2.6	2.8	3	3.2	3.4	3.6

③ Compatible Controllers

The RCS2 series actuators can operate with the controllers below. Select the controller according to your usage.

Name	External View	Model	Description	Max. Positioning Points	Input Voltage	Power Supply Capacity	Standard Price	See Page
Positioner Mode		SCON-C-30D ①②-NP-2-③	Positioning is possible for up to 512 points	512 points	Single-Phase AC 100V Single-Phase AC 200V 3-Phase AC 200V (XSEL-P/Q only)	360VA max.  * When operating a 150W single-axis model	—	→ P547
Solenoid Valve Mode			Operable with same controls as solenoid valve.	7 points				
Serial Communication Type			Dedicated to serial communication	64 points				
Pulse Train Input Control Type			Dedicated to Pulse Train Input	(-)				
Program Control 1-2 Axis Type		SSEL-C-1-30D ①②-NP-2-③	Programmed operation is possible Can operate up to 2 axes	20000 points			—	→ P577
Program Control 1-6 Axis Type		XSEL-4-1-30D ①②-N1-EEE-2-⑤	Programmed operation is possible Can operate up to 6 axes	20000 points			—	→ P587

- \* For SSEL and XSEL, only applicable to the single-axis model.
- \* ① is a placeholder for the encoder type (I: incremental, A: absolute).
- \* ② is a placeholder for the code "HA" when the high acceleration/deceleration option is specified.
- \* ③ is a placeholder for the power supply voltage (1: single-phase 100V, 2: single phase 200V).
- \* ④ is a placeholder for the XSEL type name (J, K, P, Q).
- \* ⑤ is a placeholder for the power supply voltage type (1: 100V, 2: single-phase 200V, 3: 3-phase 200V).