

ROBO Cylinder High Thrust Type

RCP2-RFA/RFW


- Maximum push force of 6000 N (612 kgf)
- High thrust type also suitable for use in a motorized press




Features

- The RCP2-RFA achieves a maximum push force of 6000 N, more than seven times the maximum push force available on a conventional model (800 N).
- Its high-performance closed-loop stepper function provides a maximum of 64 positions; high positioning repeatability of ± 0.02 mm; and speed setting capability.
- Choose a desired stroke from six levels of 50 to 300 mm, and maximum push force from three levels of 1500, 3000 and 6000 N.
- Maximum vertical load capacity of 150 kg (in the case of 2.5 lead)

Examples of Use

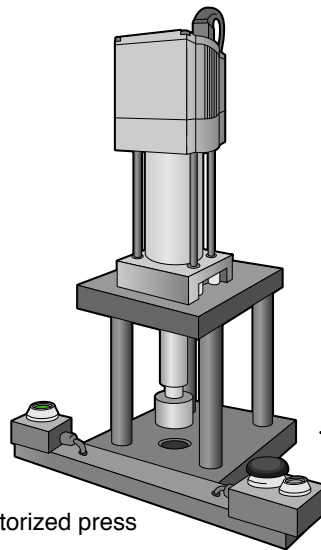


Motorized press

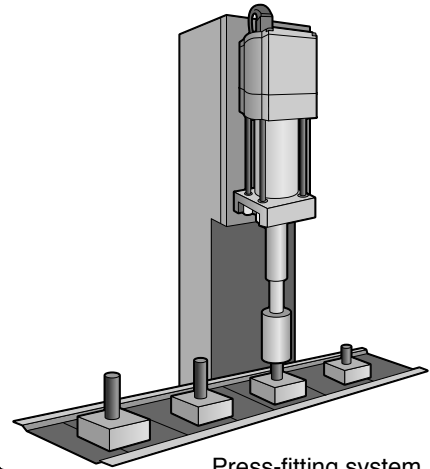


Press-fitting system

Models

Actuator model

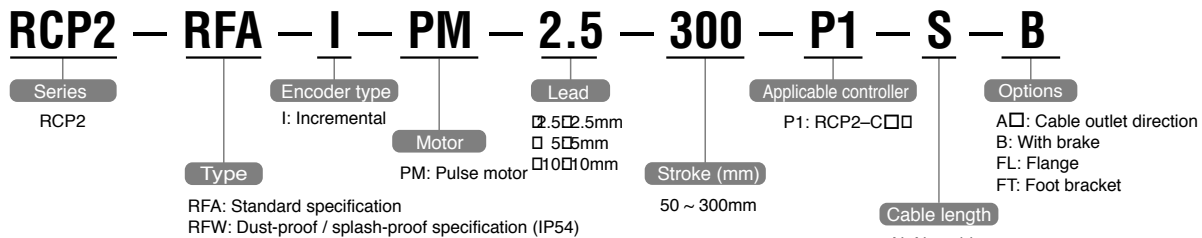

Controller model

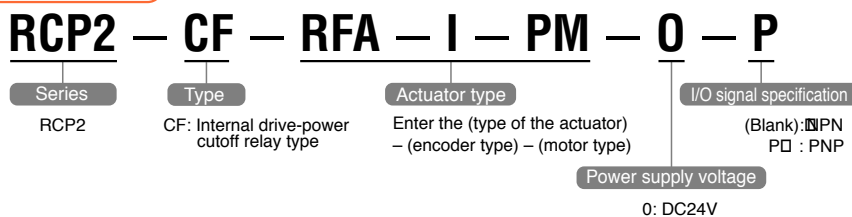

RCP2-RFA ROBO Cylinder High Thrust Type, Body Width 100mm, Pulse Motor
RCP2-RFW ROBO Cylinder High Thrust Type Dust-proof / Splash-proof Specification, Body Width 100mm, Pulse Motor



Type / Rod (100mm wide) Stroke / 50 ~ 300mm Load capacity / 300kg (horizontal)/150kg (vertical)

Model Specification Items Series Type Encoder type Motor output Lead Stroke Applicable controller Cable length Option
 (Example) : RCP2 - RFA - I - PM - 5 - 10 - P1 - 2 - 3

Models/Specifications

* The maximum speed of the RCP2 series will vary according to the weight of the load installed on the slider (or rod). Refer to the diagram on the back cover for the relationship of speed and load capacity.

Model	Encoder type	Motor type	Lead (mm)	Stroke (50mm increments) (mm)	Speed (Note 1) (mm/s)	Maximum load capacity (Note 2)			Maximum push force (N)	
						Horizontal (kg)		Vertical (kg)		
						Rated (Note 3)	Max (Note 3)	Rated (Note 3)	Max (Note 3)	
RCP2-RFA[RFW]-I-PM-10-10-P1-2-3	Incremental	Pulse motor	10	50 ~ 300	10 ~ 250 <167>	80		47	80	1500
RCP2-RFA[RFW]-I-PM-5-10-P1-2-3			5		5 ~ 125	150		51	100	3000
RCP2-RFA[RFW]-I-PM-2.5-10-P1-2-3			2.5		1 ~ 63	300		39	150	6000

* In the above model names, 1 the stroke, 2 the cable length, and 3 the applicable options.

Option

Name	Type	Reference Page
Brake	B	—
With flange	FL	→ P189
With foot bracket	FT	→ P189

Common Specifications


Drive system	Ball screw, rolled C10
Positioning repeatability	±0.02mm
Backlash	0.05mm or less
Guide	—
Rod diameter	φ40
Rod non-rotative accuracy (Note 4)	±1.0°
Base	Material: Aluminum with white alumite treatment
Cable length (Note 5)	N: No cable, P: 1m, S: 3m, M: 5m, X□: Length Specification, R□: Robot cable

Cables

Name	Type	Remarks
Motor cable	CB-RCP2-MA□□□	Same as the RCP2-series cable
Encoder cable	CB-RFA-PA□□□	Dedicated cable for the high thrust type


Dimensions

* Due to its structure, the rod type is not available in the reversed-home specification. Exercise caution.

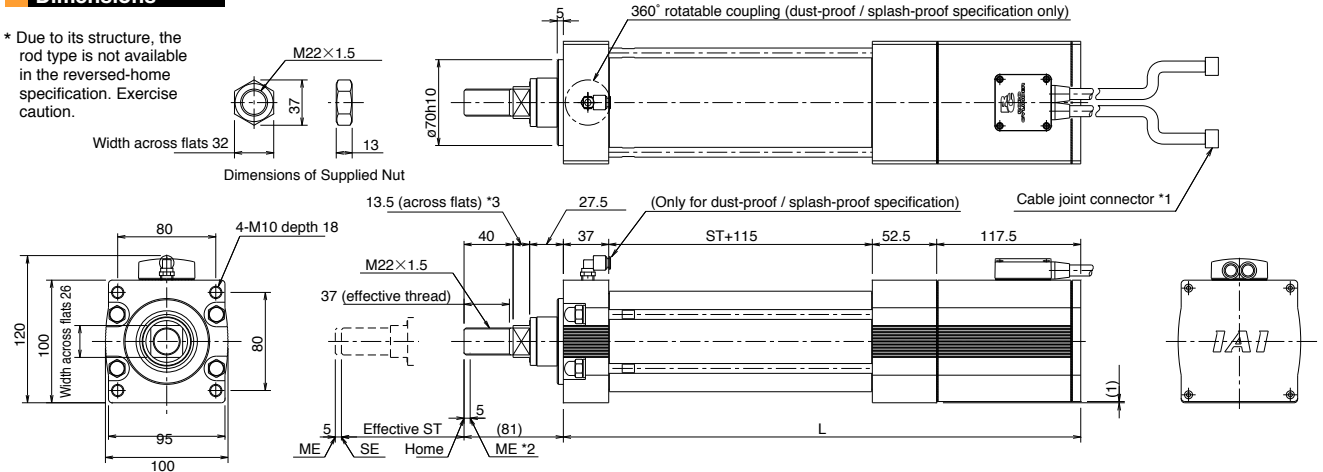

- *1. Connect the motor/encoder cables. The motor cable is the same as the one used for the RCP2 series, but take note that the encoder cable is of a dedicated specification.
- *2. During home return the rod will move to the ME, so be careful to prevent contact with surrounding parts. ME: Mechanical end SE: Stroke end Reference dimensions are shown in parentheses.
- *3. The direction of the across flats will vary depending on the product.

Brake Dimensions

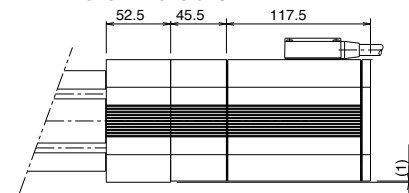

Maximum Speed by Stroke

Stroke	50	100	150	200	250	300
L	372	422	472	522	572	622
Weight (kg)	9	9.5	10	10.5	11	11.5
Maximum speed (mm/s)	Lead: 10	250 <167>				
	Lead: 5	125				
	Lead: 2.5	63				

Applicable Controller Specifications

Applicable controller	Maximum number of controlled axes	Compatible encoder type	Program operation	Positioner operation	Pulse-train control	Power supply voltage
RCP2-CF-RFA RCP2-CF-RFW	1 axis	Incremental	×	○	×	DC24V



(Note 1) The figures in < > applies to a vertical application.
 (Note 2) Maximum load capacity remains the same regardless of the speed.
 (Note 3) As to the definition of rated and max, please refer to the correlation diagram of vertical load capacity and travel life in page 189.
 The above load capacity based on an acceleration of lead 10: 0.04 G, lead 5: 0.02 G, and lead 2.5: 0.01 G.
 The horizontal load capacity assumes use of a guide.
 (Note 4) Rod non-rotative accuracy with the guide rod retracted.
 (Note 5) The maximum cable length is 20 m. Specify the desired length in meters (ex. X08 = 8 m).

RCP2 New Product Lines