

RCP2-RXA

ROBO Cylinder Rod Type: Unit Width 35mm, Pulse Motor, Standard Specification



Type Rod (35mm wide), standard Stroke 50~200mm Load capacity 30kg (horizontal)/10kg (vertical)

Model Specification Items Series Type Encoder type Motor Lead Stroke Applicable controller Cable length Options
 (Example) RCP2 -RXA - I - PM - 5 - 200 - P1 - S - FL

* Refer to page 37 for the details of the model specification items.

* The maximum speed limit of the RCP2 Series will vary according to the weight of the load on the slider (rod). Refer to Correlation Diagrams of Speed and Load Capacity on page 28.

Model/Specifications

Model	Encoder type	Motor	Lead (mm)	Stroke 50mm increments (mm)	Speed (mm/s)	Load capacity (Note 1)		Maximum push force (N)
						Horizontal (kg)	Vertical (kg)	
RCP2-RXA-○-PM-5-***-P1-△-□	Absolute Incremental	Pulse motor	5	50~200	5~187	15~2	6~1	73.5
RCP2-RXA-○-PM-2.5-***-P1-△-□			2.5		1~114	30~4	10~2	156.8

* In the above model names, ○ indicates the encoder type, *** the stroke, △ the cable length, and □ the applicable options.

Options

Name	Model	Page
With flange	FL	→P138
With foot bracket	FT	→P139


Note) The RXA type is not available with a brake.

Common Specifications

Drive system	Ball screw ø8mm, rolled C10
Positioning repeatability	±0.02mm
Backlash	0.05mm or less
Guide	—
Rod diameter	ø22mm
Rod non-rotative accuracy	±1.5°
Base	Material: Aluminum with white alumite treatment
Cable length (Note 2)	N: No cable, P: 1m, S: 3m, M: 5m, X□□: Length specification, R□□: Robot cable


Dimensions

* Due to its structure, the rod type is not available in the reversed-home specification. Exercise caution.

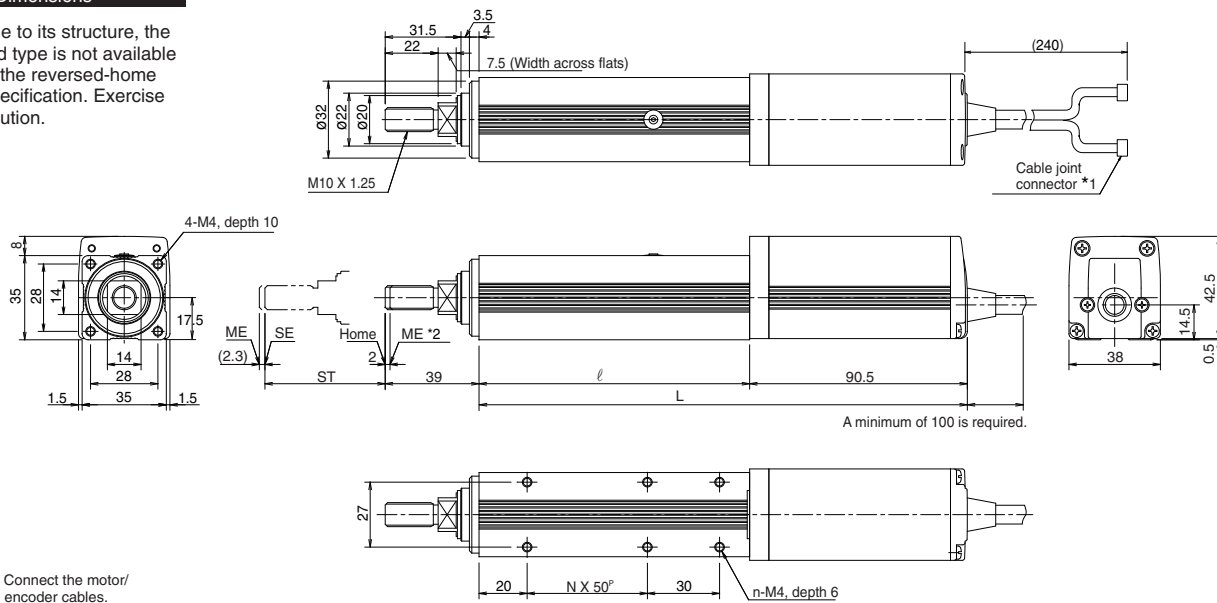

*1. Connect the motor/encoder cables. Refer to page 160 for details on the cables.

*2. During home return the rod will move to the ME, so be careful to prevent contact with surrounding parts. ME: Mechanical end SE: Stroke end Reference dimensions are shown in parentheses.



Dimensions, Weight and Maximum Speed by Stroke

Stroke	Stroke			
	50	100	150	200
ℓ	112.5	162.5	212.5	262.5
L	203	253	303	353
N	1	2	3	4
n	6	8	10	12
Weight (kg)	0.8	0.95	1.1	1.25
Maximum speed (mm/s)	Lead 5	187		
	Lead 2.5	114		

Applicable Controller Specifications

Applicable Controller	Maximum number of controlled axes	Compatible encoder type	Program operation	Positioner operation	Pulse-train control	Power-supply voltage	Page
RCP2-C	1 axis	Absolute Incremental	X	O	X	24VDC	→P151
RCP2-CG	1 axis		X	O	X		→P151



(Note 1) The load capacity is based on operation at an acceleration of 0.2 G.
 (Note 2) The maximum cable length is 15 m for the absolute type and 20 m for the incremental type. Specify the desired length in meters (e.g., X08 = 8 m).

* Refer to page 23 for other points to note.