



# EC-R6



## Model Specification Items

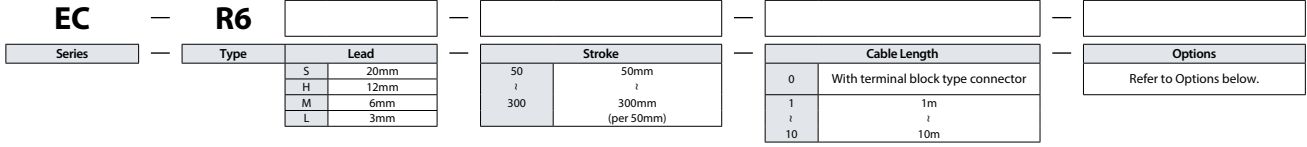

- POINT Selection Notes**
- (1) The actuator specifications display the payload's maximum value, but it will vary depending on the acceleration and speed. Please refer to "Table of Payload by Speed/Acceleration" for more details.
  - (2) The value of the horizontal payload assumes that there is an external guide. Please be aware that the anti-rotation stopper can be damaged when an external force is applied to the rod from any direction other than the moving direction.
  - (3) When performing a push-motion operation, please refer to the "Correlation graph between push force and current limit value." Push force is only a Reference value. Please refer to P115 for details.
  - (4) Limit on duty may be needed depending on the ambient operation temperature. Please refer to P109 for details.
  - (5) Special attention needs to be paid to the mounting orientation. Please refer to P33 for details.

Stroke (mm)	EC-R6	Stroke (mm)	EC-R6
50	○	200	○
100	○	250	○
150	○	300	○

Cable code	Cable length
0	No cable (with connector)
1 ~ 3	1 ~ 3m
4 ~ 5	4 ~ 5m
6 ~ 10	6 ~ 10m

(Note) Robot cables.

Type	Option code	Reference page
Brake	<b>B</b>	See P.101
Flange (front)	<b>FL</b>	See P.102
Foot bracket	<b>FT</b>	See P.103
Tip adapter (Internal thread)	<b>NFA</b>	See P.106
Non-motor end specification	<b>NM</b>	See P.108
PNP specification	<b>PN</b>	See P.108
Split motor and controller power supply specification	<b>TMD2</b>	See P.109
Battery-less Absolute Encoder specification	<b>WA</b>	See P.109
Wireless communication specification	<b>WL</b>	See P.109
Wireless axis-operation specification	<b>WL2</b>	See P.109

## Main specifications

Item		Description				
Lead	Ball screw lead (mm)	20	12	6	3	
Horizontal	Payload	Max. payload (kg) (energy-saving disabled)	6	25	40	60
		Max. payload (kg) (energy-saving enabled)	6	25	40	40
	Max. speed (mm/s)	800	700	450	225	
	Speed/acceleration/deceleration	Min. speed (mm/s)	25	15	8	4
		Rated acceleration/deceleration (G)	0.3	0.3	0.3	0.3
Max. acceleration/deceleration (G)		1	1	1	1	
Vertical	Payload	Max. payload (kg) (energy-saving disabled)	1.5	4	10	12.5
		Max. payload (kg) (energy-saving enabled)	1	4	10	12.5
	Speed/acceleration/deceleration	Max. speed (mm/s)	800	700	450	225
		Min. speed (mm/s)	25	15	8	4
Rated acceleration/deceleration (G)		0.3	0.3	0.3	0.3	
Push force	Max. acceleration/deceleration (G)	0.5	0.5	0.5	0.5	
	Pushing max. thrust force (N)*	67	112	224	449	
Brake	Pushing max. speed (mm/s)	20	20	20	20	
	Brake holding specification	Non-excitation actuating solenoid brake				
Stroke	Brake holding force (kgf)	1.5	4	10	12.5	
	Min. stroke (mm)	50	50	50	50	
	Max. stroke (mm)	300	300	300	300	
	Stroke pitch (mm)	50	50	50	50	

Item	Description
Driving system	Ball screw φ10mm, Rolling C10
Positioning repeatability	±0.05mm
Lost motion	-
Rod	φ25mm Material: Aluminum Hard alumite treatment
Rod non-rotation accuracy (Note 1)	±1.5 degree
Allowable load and torque on the rod tip.	0.5N·m
Ambient operation temperature/humidity	0~40°C, 85%RH or less (Non-condensing)
Degree of protection	IP20
Vibration & shock resistance	4.9m/s <sup>2</sup> 100Hz or less
Overseas standards	CE marking, RoHS (Restriction of Hazardous Substances)
Motor type	Stepper motor
Encoder type	Incremental / battery-less absolute
Number of encoder pulses	800 pulse/rev

(Note 1) The rod tip displacement angle (initial reference value) when allowable static torque is applied on rod tip when most of the rod is in the body.

\* Speed limitation applies to push motion. See the manual or contact IAI.

## Table of Payload by Speed/Acceleration

Setting for energy-saving disabled Unit for payload is kg. Operations on the blank locations are not possible.

### Lead 20

Orientation	Horizontal Acceleration (G)						Vertical Acceleration (G)						
	0.3	0.5	0.7	1	0.3	0.5	0.3	0.5	0.7	1	0.3	0.5	
Speed (mm/s)	0	6	6	5	5	1.5	1.5	0	6	5	5	1.5	1.5
160	6	6	5	5	1.5	1.5	0	6	5	5	1.5	1.5	
320	6	6	5	3	1.5	1.5	0	6	5	3	1.5	1.5	
480	6	6	5	3	1.5	1.5	0	6	5	3	1.5	1.5	
640	6	4	3	2	1.5	1.5	0	6	4	3	2	1.5	1.5
800	4	3			1	1	0	6	4	3	2	1.5	1.5

### Lead 12

Orientation	Horizontal Acceleration (G)						Vertical Acceleration (G)							
	0.3	0.5	0.7	1	0.3	0.5	0.3	0.5	0.7	1	0.3	0.5		
Speed (mm/s)	0	25	18	16	12	4	4	0	25	18	16	12	4	4
100	25	18	16	12	4	4	0	25	18	16	12	4	4	
200	25	18	16	10	4	4	0	25	18	16	10	4	4	
400	20	14	10	6	4	4	0	20	14	10	6	4	4	
500	15	8	6	4	3.5	3	0	15	8	6	4	3.5	3	
700	6	2			2	1	0	6	2			2	1	

### Lead 6

Orientation	Horizontal Acceleration (G)						Vertical Acceleration (G)							
	0.3	0.5	0.7	1	0.3	0.5	0.3	0.5	0.7	1	0.3	0.5		
Speed (mm/s)	0	40	35	30	25	10	10	0	40	35	30	25	10	10
50	40	35	30	25	10	10	0	40	35	30	25	10	10	
100	40	35	30	25	10	10	0	40	35	30	25	10	10	
200	40	30	25	20	10	10	0	40	30	25	20	10	10	
250	40	27.5	22.5	18	9	8	0	40	27.5	22.5	18	9	8	
350	30	14	12	10	5	5	0	30	14	12	10	5	5	
400	18	10	6	5	3	3	0	18	10	6	5	3	3	
450	8	3			2	1	0	8	3			2	1	

### Lead 3

Orientation	Horizontal Acceleration (G)						Vertical Acceleration (G)							
	0.3	0.5	0.7	1	0.3	0.5	0.3	0.5	0.7	1	0.3	0.5		
Speed (mm/s)	0	60	50	45	40	12.5	12.5	0	60	50	45	40	12.5	12.5
50	60	50	45	40	12.5	12.5	0	60	50	45	40	12.5	12.5	
100	60	50	45	40	12.5	12.5	0	60	50	45	40	12.5	12.5	
125	60	50	40	30	10	10	0	60	50	40	30	10	10	
175	40	35	25	20	6	5	0	40	35	25	20	6	5	
200	35	30	20	14	5	4.5	0	35	30	20	14	5	4.5	
225	16	16	10	6	5	4	0	16	16	10	6	5	4	

■ Setting for energy-saving enabled Unit for payload is kg.

**Lead 20**

Orientation	Horizontal			Vertical
	Acceleration (G)			
Speed (mm/s)	0.3	0.7	0.3	
0	6	5	1	
160	6	5	1	
320	6	5	1	
480	4	3	1	
640	3	1	0.5	

**Lead 12**

Orientation	Horizontal			Vertical
	Acceleration (G)			
Speed (mm/s)	0.3	0.7	0.3	
0	25	10	4	
100	25	10	4	
200	25	10	4	
300	20	8	3	
400	10	5	2	
500	5	2	1	

**Lead 6**

Orientation	Horizontal			Vertical
	Acceleration (G)			
Speed (mm/s)	0.3	0.7	0.3	
0	40	20	10	
50	40	20	10	
100	40	20	10	
150	40	20	8	
200	35	18	5	
250	10	6	3	

**Lead 3**


Orientation	Horizontal			Vertical
	Acceleration (G)			
Speed (mm/s)	0.3	0.7	0.3	
0	40	25	12.5	
25	40	25	12.5	
50	40	25	12.5	
75	40	25	12	
100	40	25	9	
125	40	25	5	

**Stroke and maximum speed**

Lead (mm)	Energy-saving mode	50-200 (per 50mm)	250 (mm)	300 (mm)
		20	Disabled	800
	Enabled	640		
12	Disabled	700		547
	Enabled	500		
6	Disabled	450	376	268
	Enabled		250	
3	Disabled	255	186	133
	Enabled		125	

(Unit is mm/s)

**Correlation between push force and current limit value**

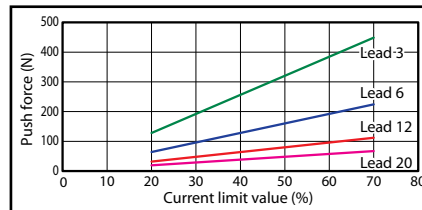


**Dimensions**

\*1 When the rod is returning to its home position, please be careful of interference from surrounding objects, as it will travel until it reaches the M.E.  
\*2 The direction of width across flats varies depending on the product. Those flats cannot be used for reference plane.

CAD drawings can be downloaded from our website.

www.intelligentactuator.com

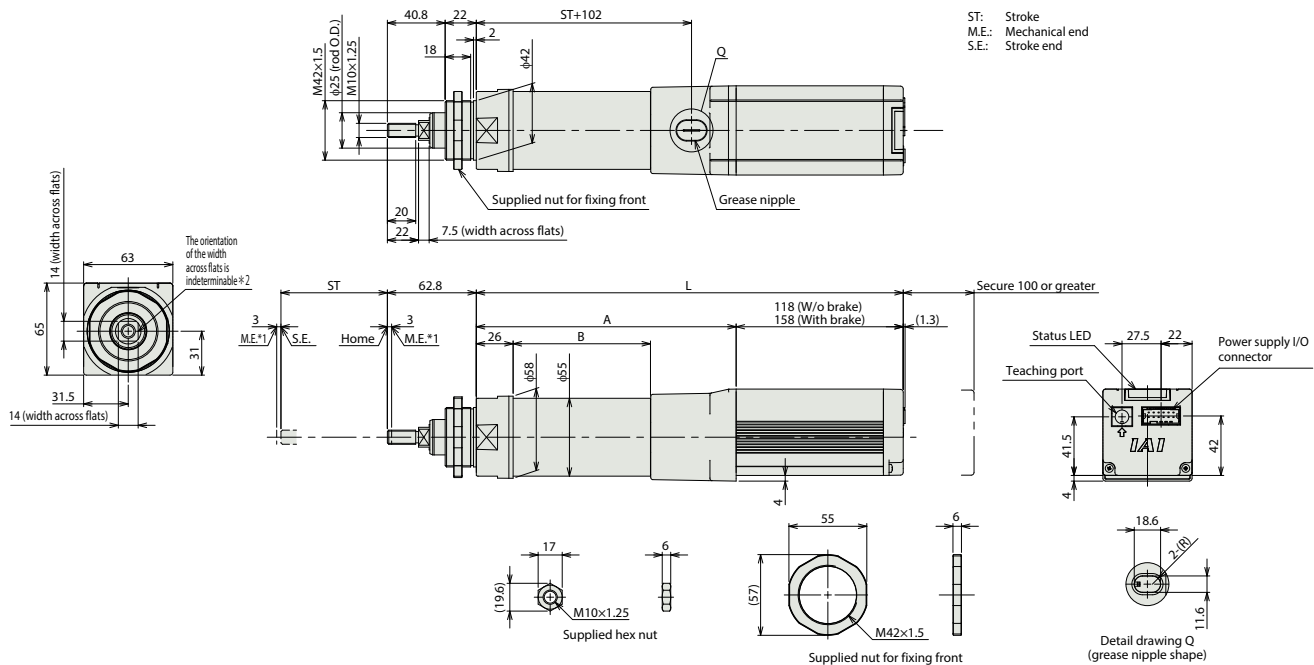

ST: Stroke  
M.E.: Mechanical end  
S.E.: Stroke end

■ Dimensions by stroke

L	Stroke	50	100	150	200	250	300
		W/o Brake	301.5	351.5	401.5	451.5	501.5
	With Brake	341.5	391.5	441.5	491.5	541.5	591.5
	A	183.5	233.5	283.5	333.5	383.5	433.5
	B	97	147	197	247	297	347

■ Mass by stroke

Weight (kg)	Stroke	50	100	150	200	250	300
		W/o Brake	1.6	1.8	2	2.2	2.4
	With Brake	1.8	2	2.2	2.4	2.6	2.8

**Applicable controller**

(Note) The EC series is equipped with a built-in controller. Please refer to P116 for details.