

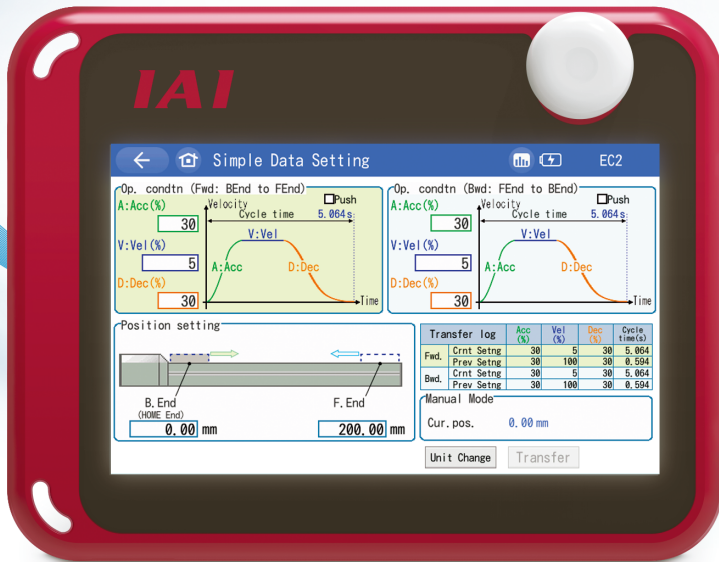


Data Setter **TB-03**

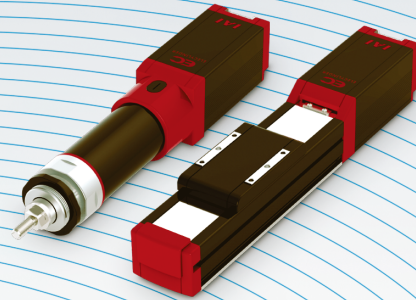

# Less wiring, simple, and swift with wireless connection. Now available: ELECYLINDER Data Setter TB-03!

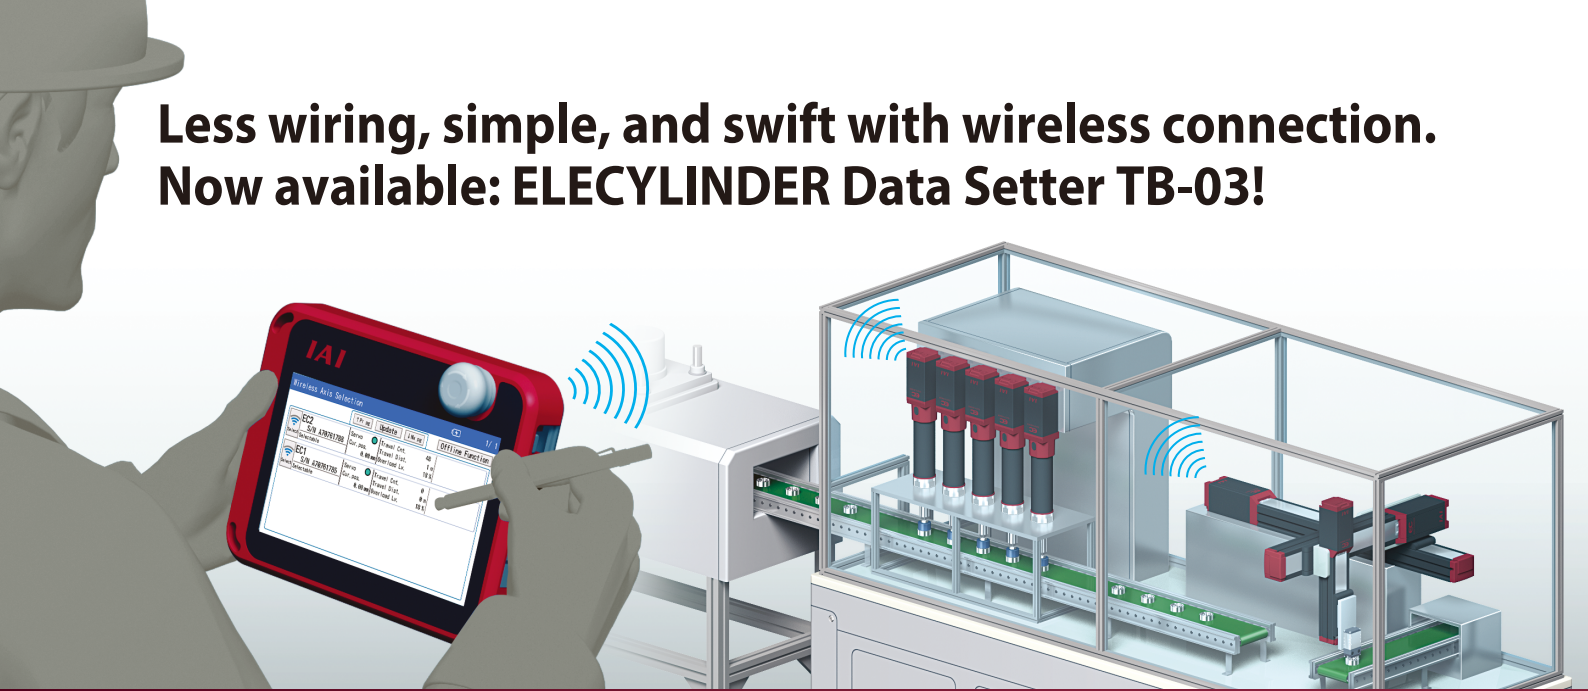

## TB-03 Features

### 1. Set operating conditions with wireless connection

Position adjustment and operating conditions can be set from outside the equipment, even without a cable connection to the ELECYLINDER body.

\* Actuator operation requires cable connection.



### 2. Status monitoring makes daily maintenance easier and shortens trouble recovery time

TB-03 can monitor the operating status of up to 16 axes while receiving wireless data from the ELECYLINDER. Error recovery time also can be shortened by troubleshooting with wireless communication.

Status monitor screen

**Axis Name Display**

Can be configured (changed) arbitrarily according to customer applications.

**Status Monitor**

Axis status check can be used for confirmation of maintenance timing.

 Select	<b>EC2</b> S/N A70761788 Selectable	Servo <span style="color: green;">●</span> Cur. pos. 0.00 mm	<b>Travel Cnt.</b> Travel Dist. Over load Lv.	<b>52</b> 1 m 12 %	<b>Alarm Group</b> Warnin Maintenance warning 1
------------	---	--	---	--------------------------	--

**Error Status Monitor**

Alarms and warnings are displayed when generated. Useful for troubleshooting.

Troubleshooting screen

Alarm display Alarm list Check model num. Inquiry


Alarm list

Search the alarm No. to check the alarm description and perform troubleshooting.

No.	Group	Name	Alarm code	Time
1	Warning	Maintenance warning 1	5555 04E	0:03:00
2	Warning	Overload	5555 05F	0:03:00
3	Warning	Overload	5555 06E	0:03:00
4	Warning	Overload	5555 07E	0:03:00
5	Warning	Overload	5555 08E	0:03:00

### 3. Supports position/program controller

Dedicated cables can connect the TB-03 to all the controllers. The same functions and operation of the previous TB-02 are available.

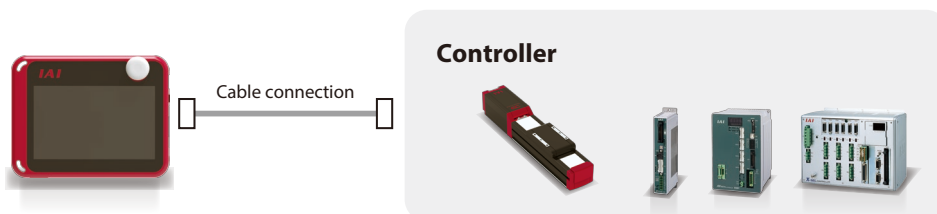

## Model Number

One unit supports all controllers, although the cable must be selected in accordance with the controller to be connected. Select the AC adapter for the appropriate operating environment.

Model **TB-03-** Cable - AC adapter

### ● Body + cable + AC adapter set model

Connected controller	Model		Cable	
	Body + cable	AC adapter	For ELECYLINDER/ position controller	For program controller
ELECYLINDER Position Controller	TB-03-C	(Blank)/C/E/K	① CB-TB3-C050	-
		N *2		
Program Controller	TB-03-S	(Blank)/C/E/K	-	② CB-TB3-S050 + ③ CB-SEL-SJS002
		N *2		
ELECYLINDER Position Controller Program Controller	TB-03-SC	(Blank)/C/E/K	① CB-TB3-C050	② CB-TB3-S050 + ③ CB-SEL-SJS002 (conversion cable) *3
		N *2		
	TB-03-SCN *1	(Blank)/C/E/K	-	-
		N *2		

\*1 No cable

\*2 No AC adapter

### ● Cable single product model number

Connected controller	Model
ELECYLINDER Position Controller	① CB-TB3-C050
Program Controller	② CB-TB3-S050
	③ CB-SEL-SJS002 (conversion cable) *3


\*3 Use with the ② cable when connecting to ASEL, PSEL, SSEL, or MSEL

### ● AC adapter single product model number

Connected controller	Model	Specification	Single product model number
ELECYLINDER Position Controller Program Controller	(Blank)	For Japan/North America/Thailand	UN318-5928
	C	For China	UNZ318-5928
	E	For Europe	UNE318-5928
	K	For Korea	UNR318-5928

## Connection


### ● Wireless connection (ELECYLINDER only)

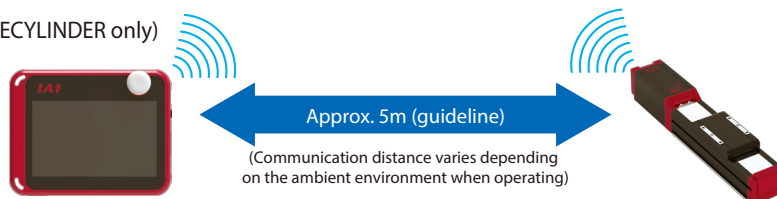

\* Connectable only for models with "WL" (wireless communication) option in the model number

Caution: Certification issues limit the countries in which wireless communication can be used. Contact our sales personnel for details.

### ● Wired connection (cable connection)

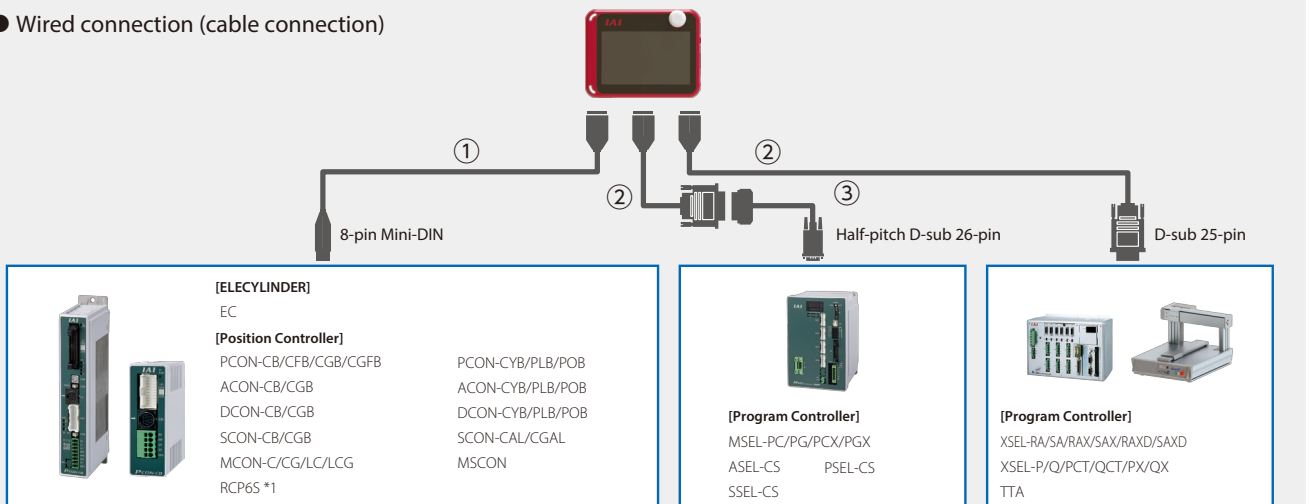

\*1 A gateway unit or PLC connection unit is required in order to operate RCP6S.

**Body Specifications**

Power input	24VDC ±10% [supplied from controller]
Voltage range	5.9VDC (5.7 to 6.3V) [supplied from AC adapter]
Power consumption	3.6W or less
Consumption current	150mA (supplied from controller)
Ambient operating temperature	0 to 40°C (no condensation or freezing)
Ambient operating humidity	85% RH or less (no condensation or freezing)
Ambient storage temperature	-20 to 40°C
Vibration resistance	10 to 57Hz Amplitude 0.075mm
Ingress protection	IPX0
Mass	670g (body) + approx. 285g (dedicated cable)
Liquid crystal	7" TFT color WVGA (800 x 480)
External memory	SD/SDHC memory card interface mounted (1G to 32G)
Charging method	Wired connection with dedicated AC adapter/controller
Language support	Japanese/English/Chinese


**Wireless Function (when connected to ELECYLINDER only)**

Wireless connection	Bluetooth 4.2 Class 2
Wireless function	Data setter/monitor function
Operation command/stop command	No
Max. number of connectable axes	16-axis
Operation	Battery (AB-7) operation
Wireless operating time	Max. 4 hours (battery driven)
Battery life	Cycle durability 300 times


**AC Adapter Common Specifications**

Power input voltage range	Single-phase 100 to 240VAC ±10%
Power supply current	0.4A max.
Consumption current	2.8A max.
Output voltage	5.9VDC (5.7 to 6.3V)
Charging time	Approx. 3 hours
Cable length	1500 ±100mm

**Name of Each Component**

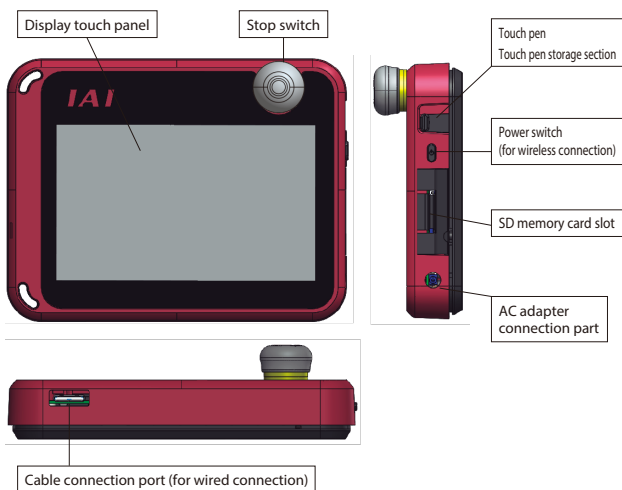


**External Dimensions**

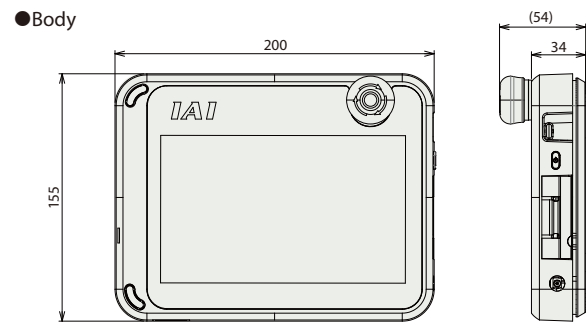


●Body


For Japan/North America/Thailand: UN318-5928

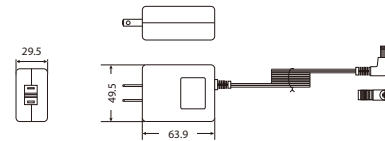

For China: UNZ318-5928

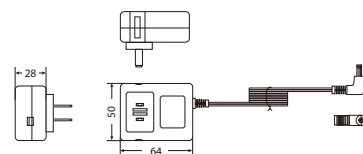

For Europe: UNE318-5928  
For Korea: UNR318-5928

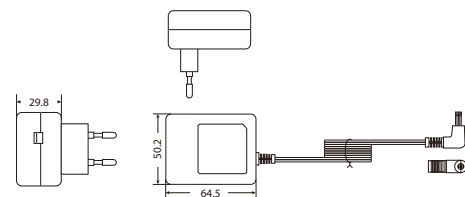

**Options**

- Strap: STR-1
- Spiral cable: SIC-1
- Grip belt: GRP-2
- Maintenance Parts  
Battery unit: AB-7

**IAI America, Inc.**

**USA Headquarters & Western Region (Los Angeles):** 2690 W. 237th Street, Torrance, CA 90505 (800) 736-1712  
**Midwest Branch Office (Chicago):** 110 E. State Pkwy, Schaumburg, IL 60173 (800) 944-0333  
**Southeast Branch Office (Atlanta):** 1220 Kennestone Circle, Suite 108, Marietta, GA 30066 (678) 354-9470  
[www.intelligentactuator.com](http://www.intelligentactuator.com)

**JAPAN Headquarters:** 577-1 Obane, Shimizu-ku, Shizuoka-shi, Shizuoka, 424-0103, JAPAN  
 The information contained in this product brochure may change without prior notice due to product improvements.

**IAI Industrieroboter GmbH**

Ober der Röth 4, D-65824 Schwalbach am Taunus, Germany  
**IAI (Shanghai) Co., Ltd.**  
 Shanghai Jiahua Business Center A8-303, 808, Hongqiao Rd., Shanghai 200030, China

**IAI Robot (Thailand) Co., Ltd.**  
 825 Phairokijja Tower 7th Floor, Debaratana Rd., Bangna Nuea, Bangna, Bangkok 10260, Thailand