


# ISDB-L-200

Single-axis robot/Large, dustproof type/Actuator width: 150mm/200W  
Straight shape

# ISPDB-L-200

Single-axis robot/Large, dustproof type/Actuator width: 150mm/200W  
Straight shape **High precision specification**

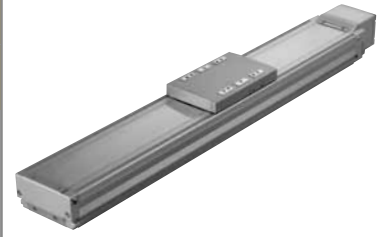

### Model Specification Items

Series	L	Type	Encoder type	Motor type	Lead	Stroke	Applicable controller	Cable length	Options
ISDB: Standard specification ISPDB: High precision specification			A: Absolute specification I: Incremental specification	200: 200W	40: 40mm 20: 20mm 10: 10mm	100: 100mm 1300: 1300mm (in 50mm increments)	T1: XSEL-J/K T2: SCON SSEL XSEL-P/Q	N: None S: 3m M: 5m X□□: Specified length	Refer to the options table below.

\* Refer to P.10 for the details of items comprising the model number.

### Model Number/Specification

Model number	Encoder type	Motor output (W)	Lead (mm)	Stroke in 50mm increments (mm)	Speed (mm/s)	Acceleration (Note 1)				Payload (Note 1)				Rated thrust (N)
						Horizontal (G)		Vertical (G)		Horizontal (kg)		Vertical (kg)**		
						Rated	Maximum	Rated	Maximum	Rated acceleration	Maximum acceleration	Rated acceleration	Maximum acceleration	
ISDB[ISPDB]-L-①-200-40-②-③-④-⑤	Absolute Incremental	200	40	100~1300	1~1800	0.4	1.0	0.4	1.0	15	7	2.5	2	85.5
ISDB[ISPDB]-L-①-200-20-②-③-④-⑤			20		1~1200	0.4	1.0	0.4	1.0	45	15	9	5	170.9
ISDB[ISPDB]-L-①-200-10-②-③-④-⑤			10		1~600	0.4	0.7	0.4	0.6	90	40	20	14	341.8

\*In the above model numbers, ① indicates the encoder type, ② indicates the stroke, ③ indicates the applicable controller, ④ indicates the cable length, and ⑤ indicates the option(s).  
\*\*If the guide with ball retention mechanism (RT) is used, the vertical payload decreases by 1.0kg. (Please also refer to P.9).


### Option

Name	Model number	Reference page	Name	Model number	Reference page
Cable exit from the left	A1S	→P11	Home limit switch	L	→P11
Cable exit from the rear left	A1E	→P11	Home limit switch on the opposite side	LL	→P11
Cable exit from the right	A3S	→P11	Master axis specification	LM	→P12
Cable exit from the rear right	A3E	→P11	Master axis specification (sensor on the opposite side)	LLM	→P12
AQ seal (standard feature)	AQ	→P11	Non-motor side specification	NM	→P12
Brake	B	→P11	Guide with ball retention mechanism	RT	→P12
Creep sensor	C	→P11	Slave axis specification	S	→P12
Creep sensor on the opposite side	CL	→P11	High straightness, precision specification	ST	→P13

### Common Specifications

Positioning repeatability (Note 2)	±0.01mm [±0.005mm]
Drive method (Note 3)	Ball screw ø20mm, rolled C10 [equivalent to rolled C5]
Lost Motion (Note 4)	0.05mm [0.02mm] max.
Dynamic allowable load moment (Note 5)	Ma: 104.9N·m Mb: 149.9N·m Mc: 248.9N·m
Overhang load length	Ma direction: 750mm max. Mb, Mc directions: 750mm max.
Dynamic straightness (Note 6)	0.02mm/m max.
Base	Material: Aluminum, with white alumite treatment
Applicable controller	T1: XSEL-J/K T2: XSEL-P/Q, SSEL, SCON
Cable length (Note 7)	N: None, S: 3m, M: 5m, X□□: Specified length
Protection structure	IP30
Ambient operating temperature/humidity	0 to 40°C, 85%RH max. (non-condensing)

### Diagram

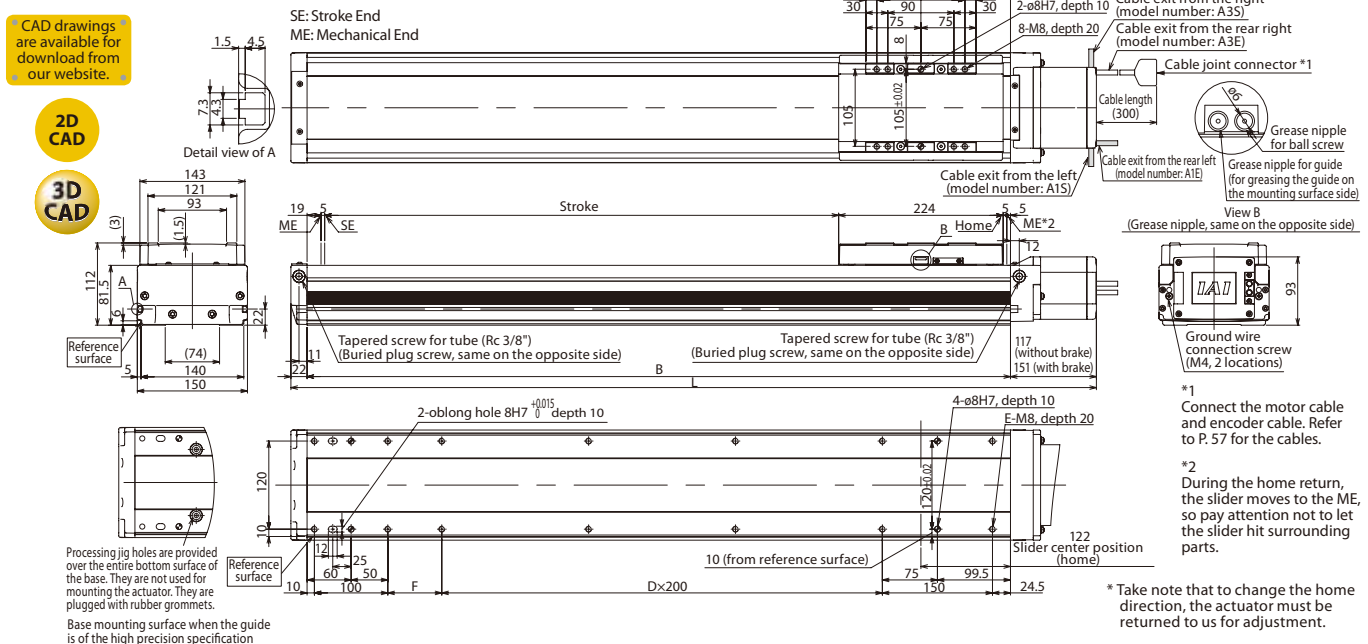

### Dimensions, Mass and Maximum Speed by Stroke

Stroke	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
	L without brake	497	547	597	647	697	747	797	847	897	947	997	1047	1097	1147	1197	1247	1297	1347	1397	1447	1497	1547	1597	1647
L with brake	531	581	631	681	731	781	831	881	931	981	1031	1081	1131	1181	1231	1281	1331	1381	1431	1481	1531	1581	1631	1681	1731
D	358	408	458	508	558	608	658	708	758	808	858	908	958	1008	1058	1108	1158	1208	1258	1308	1358	1408	1458	1508	1558
B	0	0	0	1	1	1	1	2	2	2	2	2	3	3	3	4	4	4	5	5	5	6	6	6	6
E	8	8	8	10	10	10	10	12	12	12	12	14	14	14	14	16	16	16	16	18	18	18	18	20	20
F	73.5	123.5	173.5	223.5	273.5	323.5	373.5	423.5	473.5	523.5	573.5	623.5	673.5	723.5	773.5	823.5	873.5	923.5	973.5	1023.5	1073.5	1123.5	1173.5	1223.5	1273.5
Mass (kg)	11.8	12.7	13.6	14.4	15.3	16.2	17.0	17.9	18.8	19.6	20.5	21.4	22.3	23.1	24.0	24.9	25.7	26.6	27.5	28.3	29.2	30.1	31.0	31.8	32.7
Maximum speed (mm/s)	1800																								
	Lead 40													1700											
	Lead 20													1540											
Lead 10													1290												
													1185												
Lead 5													1095												
													1015												
Lead 3													940												
													875												
Lead 1.5													815												
													755												
Lead 0.5													770												
													705												
Lead 0.2													645												
													595												
Lead 0.1													545												
													505												
Lead 0.05													470												
													440												
Lead 0.02													425												
													385												
Lead 0.01													350												
													320												

\*If the brake is equipped, the mass increases by 0.5kg. \*The maximum speed (mm/s) varies depending on the stroke.

### Applicable Controller Specifications

Applicable Controller	Maximum number of controlled axes	Connectable encoder type	Operating method	Power-supply voltage	Reference page
X-SEL-P/Q	6 axes	Absolute/ incremental	Program	Single/three-phase 200 VAC	→P56
X-SEL-J/K	4 axes				→P56
SSEL	2 axes				→P56
SCON	1 axis				→P56
			Positioner pulse train control		→P56



(Note 1) Refer to P.9 for the relationship of acceleration and payload. (Notes 2, 3, 4) The values in [ ] apply to the ISPDB series. Other specification values apply commonly to the ISDB and ISPDB.  
(Note 5) When the traveling life is 10,000km.  
(Note 6) The value of dynamic straightness is when the high straightness, precision specification (option) is specified.  
(Note 7) The maximum cable length is 30m. Specify a desired length in meters. (Example. X08 = 8m)