

RCP2CR-GR3SM

Cleanroom ROBO Cylinder, 3-finger Gripper, Slider Type, 80mm Width, Pulse Motor

RCP2W-GR3SM

Dust-proof ROBO Cylinder, 3-finger Gripper, Slider Type, 80mm Width, Pulse Motor

Model Specification Items	RCP2CR RCP2W Series	GR3SM Type	I Encoder	42P Motor	30 Deceleration Ratio	14 Opening/Closing Stroke	Applicable Controllers	Cable Length	Options
	RCP2CR: Cleanroom RCP2W : Dust-proof		I: Incremental	42P: Pulse motor 42□size	30: Deceleration ratio 1/30	14: 14mm (7mm per finger)	P1: PCON-PL/PO/SE PSEL P3: PCON-CA PMEC/PSEP MSEP	N: None P: 1m S: 3m M: 5m X□□: Custom R□□: Robot cable	FB: Flange bracket SB: Shaft bracket VL: L-shaped vacuum joint specification

RoHS




* The figure above shows the Cleanroom Type.
There is no air vacuum joint equipped on the Dust-proof Type.


- POINT**
Note on selection
- (1) The maximum gripping force is the sum of gripping forces of all fingers at gripping point O (*) and with overhang distance O. For the actual transportable work part weight, refer to the explanation to the right.
* The gripping point O should be the center of mass in the drawing.
 - (2) Refer to "How to Select Gripper" at the end of the ROBO Cylinder General Catalog for how to select a gripper.
 - (3) The rated acceleration while moving is 0.3G.

Correlation Diagram of Gripping Force and Electric Current Limit

By pressing motion, the gripping (pushing) force can be adjusted freely within the range of electric current limits of 20% to 70%.

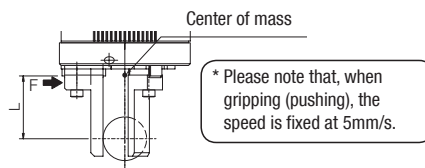

- * Keep L within 80mm from the center of mass.
- * The gripping force in the graph below assumes that L in the figure above is zero. Also note that the gripping force is a sum of gripping forces of all fingers.

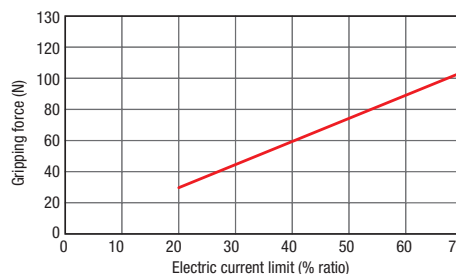

* The gripping force graph above shows reference numbers. Please allow margins up to ±15%.

Actuator Specifications

Max. Gripping Force and Stroke

Model Number	Deceleration Ratio	Max. Gripping Force (N)	Stroke (mm)
RCP2CR-GR3SM-I-42P-30-14-①-②-③	30	102 (34 per finger)	14 (7 per finger)
RCP2W-GR3SM-I-42P-30-14-①-②-③			

Legend: ① Applicable controllers ② Cable length ③ Options

Stroke and Max. Opening/Closing Speed / Suction Amount

Deceleration Ratio	Stroke	10 (mm)	Suction Amount (*)
30	50mm/s		10Nℓ/min

* For Cleanroom Type

Stroke

Stroke (mm)	Specification	Standard Price
14	Cleanroom	—
	Dust-proof	—

② Cable Length

Type	Cable Code	Standard Price	
		Applicable Controller Code	
		P3	P1
Standard Type	P (1m)	—	—
	S (3m)	—	—
	M (5m)	—	—
Special Length	X06 (6m) ~ X10 (10m)	—	—
	X11 (11m) ~ X15 (15m)	—	—
	X16 (16m) ~ X20 (20m)	—	—
Robot Cable	R01 (1m) ~ R03 (3m)	—	Robot cable is standard for P1
	R04 (4m) ~ R05 (5m)	—	
	R06 (6m) ~ R10 (10m)	—	
	R11 (11m) ~ R15 (15m)	—	
	R16 (16m) ~ R20 (20m)	—	
		—	

③ Options

Name	Option Code	Standard Price
Flange Bracket	FB	—
Shaft Bracket	SB	—
L-shaped Vacuum Joint Specification (Cleanroom Only)	VL	—

<Option Code>

FB...Bracket only: RCP2-FB-GR3M

SB...Bracket only: RCP2-SB-GR3M

* Check the size of the bracket in the option explanation at the end of the ROBO Cylinder General Catalog.

Actuator Specifications

Item	Description	
Series	Cleanroom	Dust-proof
Drive System	Worm gear+ Worm wheel gear	
Positioning Repeatability	±0.01mm	
Backlash	0.3mm or less per finger (constantly pressed out by a spring)	
Lost Motion	0.1mm or less per finger	
Allowable Static Load Moment	Ma: 6.3N·m Mb: 6.3N·m Mc: 5.7N·m	
Guide	Cross roller guide	
Cleanliness	Class 10 (0.1μm)	
IP Code	—	IP50
Weight	1.3kg	
Operating Environment	Temperature 0~40°C Humidity 20~85% RH or less (non-condensing)	

Dimensions


CAD drawings can be downloaded from the website.

www.intelligentactuator.com


2D CAD

3D CAD


- * The opening side of the slider is the home position.
- * Shown below is a drawing for the Cleanroom Type. There is no air vacuum joint equipped on the Dust-proof Type.
- * The actuator pigtail is not a robot cable.



L-shaped vacuum joint specification

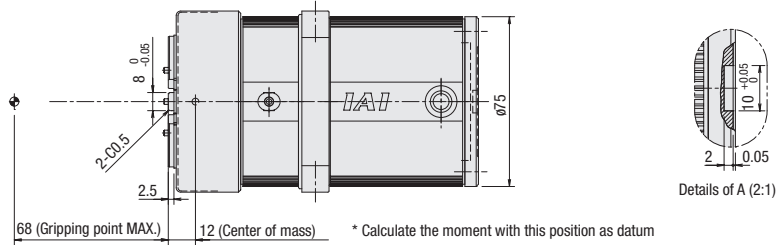

68 (Gripping point MAX.) 12 (Center of mass) * Calculate the moment with this position as datum

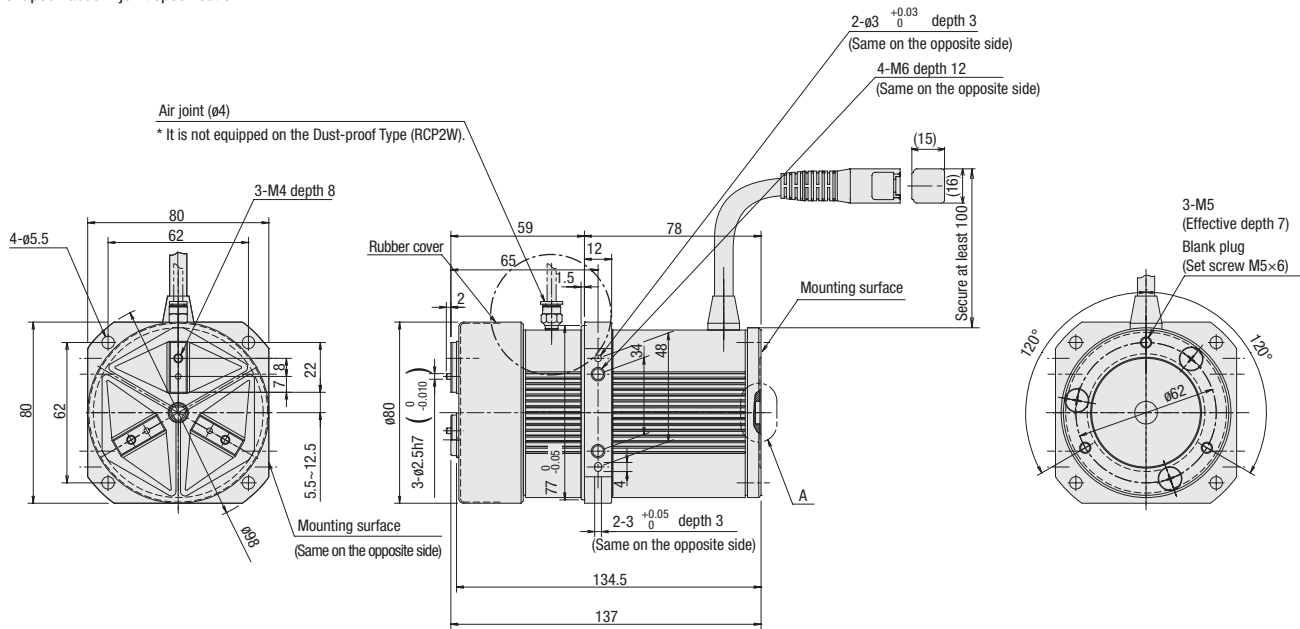

Weight (kg) 1.3

① Applicable Controllers

The RCP2 series actuators can operate with the controllers below. Select the controller according to your usage.

Name	External View	Model Number	Features	Max. Pos. Points	Input Voltage	Power Supply Capacity	Standard Price
Solenoid Valve Multi-axis Type (PIO Specification)		MSEP-①-③-④-2-0	Positioner type based on PIO control, allowing up to 8 axes to be connected	3 points	DC24V	See ROBO Cylinder General Catalog	-
Solenoid Valve Multi-axis Type (Network Specification)		MSEP-①-③-④-⑤-0-0	Field network ready positioner type, allowing up to 8 axes to be connected	256 points			-
Positioner Type High-output Specification		PCON-CA-42P①-①-2-0	Equipped with high-output driver Positioner type based on PIO control	512 points			-
Pulse Train Type High-output Specification		PCON-CA-42PWAI-PL□-2-0	Equipped with high-output driver Pulse train input type	-			-
Network Type High-output Specification		PCON-CA-42P①-⑤-0-0	Equipped with a high-output driver Supports 8 major field networks	768 points			-
Pulse Train Type (Differential Line Driver Specification)		PCON-PL-42PI-①-2-0	Pulse train input type with differential line driver support	-			-
Pulse Train Type (Open Collector Specification)		PCON-PO-42PI-①-2-0	Pulse train input type with open collector support				-
Serial Communication Type		PCON-SE-42PI-N-0-0	Dedicated serial communication	64 points			-
Program Control Type		PSEL-CS-1-42PI-①-2-0	Program operation is possible for up to 2 axes	1500 points	-		

* This is for the single-axis PSEL.

* ① indicates I/O type (NP/PM).

* ③ indicates C/LC type. Up to 6 axes can be connected if LC is selected.

* □ indicates N (NPN specification) or P (PNP specification) code.

* ③ indicates number of axes (1-8).

* ⑤ indicates field network specification code.

* ⑤ indicates encoder type. Enter WAI for incremental specification and SA for simple absolute specification.