

RCA-SA4R

ROBO Cylinder, Slider Type, Actuator Width 40mm, 24V Servo Motor, Side-mounted Motor

| | |
|---|--|
| Model Specification Items | RCA — SA4R — <input type="checkbox"/> — 20 — <input type="checkbox"/> — <input type="checkbox"/> — <input type="checkbox"/> — <input type="checkbox"/> — <input type="checkbox"/> |
| Series — Type — Encoder type — Motor type — Lead — Stroke — Applicable controller — Cable length — Options | |
| I: Incremental A: Absolute * Absolute encoder models can only use ASEL. When the actuator is used with the simple absolute encoder, the model is considered an incremental model. | 20: 20W Servo motor 10: 10mm 5: 5mm 2.5: 2.5mm 50: 50mm ? 400: 400mm (50mm pitch increments) |
| | A1: ACON ASEL A3: AMEC ASEP MSEP |
| | N: None P: 1m S: 3m M: 5m X <input type="checkbox"/> : Custom length R <input type="checkbox"/> : Robot cable |
| | See Options below. *Be sure to specify which side the motor is to be mounted (ML/MR). |

* See page Pre-47 for details on the model descriptions.



Power-saving



Pictured: Left-mounted motor model (ML).

Technical References Appendix P.5

- POINT** Notes on selection
- (1) When the stroke increases, the maximum will drop to prevent the ball screw from reaching the critical rotational speed. Use the actuator specification table below to check the maximum speed at the stroke you desire.
 - (2) The load capacity is based on operation at an acceleration of 0.3G (0.2G for the 2.5mm-lead model.) These values are the upper limits for the acceleration.
 - (3) See page A-71 for details on push motion.

*This product is equipped with a position adjusting screw at the A area shown above. (See dimensional drawing on the page to the right.)

Actuator Specifications

Leads and Payloads

| Model number | Motor output (W) | Lead (mm) | Max. Load Capacity | | Rated thrust (N) | Stroke (mm) |
|---------------------------|------------------|-----------|--------------------|---------------|------------------|---------------------|
| | | | Horizontal (kg) | Vertical (kg) | | |
| RCA-SA4R-①-20-10-②-③-④-⑤ | 20 | 10 | 4 | 1 | 19.6 | 50~400 (every 50mm) |
| RCA-SA4R-①-20-5-②-③-④-⑤ | | 5 | 6 | 2.5 | 39.2 | |
| RCA-SA4R-①-20-2.5-②-③-④-⑤ | | 2.5 | 8 | 4.5 | 78.4 | |

Stroke and Maximum Speed

| Stroke Lead | 50~400 (every 50mm) | |
|-------------|---------------------|-----|
| | 10 | 665 |
| 5 | 330 | |
| 2.5 | 165 | |

Code explanation ① Encoder ② Stroke ③ Applicable Controller ④ Cable length ⑤ Options *See page A-71 for details on push motion. (Unit: mm/s)

① Encoder type/② Stroke

| ② Stroke (mm) | Standard price | |
|---------------|----------------|----------|
| | ① Encoder Type | |
| | Incremental | Absolute |
| 50 | I | A |
| 100 | I | A |
| 150 | I | A |
| 200 | I | A |
| 250 | I | A |
| 300 | I | A |
| 350 | I | A |
| 400 | I | A |

④ Cable Length

| Type | Cable symbol | Standard Price |
|----------------|-----------------------|----------------|
| Standard | P (1m) | — |
| | S (3m) | — |
| | M (5m) | — |
| Special length | X06 (6m) ~ X10 (10m) | — |
| | X11 (11m) ~ X15 (15m) | — |
| | X16 (16m) ~ X20 (20m) | — |
| Robot Cable | R01 (1m) ~ R03 (3m) | — |
| | R04 (4m) ~ R05 (5m) | — |
| | R06 (6m) ~ R10 (10m) | — |
| | R11 (11m) ~ R15 (15m) | — |
| | R16 (16m) ~ R20 (20m) | — |

* See page A-59 for cables for maintenance.


⑤ Options

| Name | Option code | See page | Standard price |
|-------------------------------|-------------|----------|----------------|
| Brake | B | → A-42 | — |
| Home sensor | HS | → A-50 | — |
| Power-saving | LA | → A-52 | — |
| Non-motor end specification | NM | → A-52 | — |
| Left-mounted motor (standard) | ML | → A-52 | — |
| Right-mounted motor | MR | → A-52 | — |
| Slider roller specification | SR | → A-55 | — |
| Slider spacer | SS | → A-55 | — |

Actuator Specifications

| Item | Description |
|---|--|
| Drive System | Ball screw, ø8mm, rolled C10 |
| Positioning repeatability | ±0.02mm |
| Lost Motion | 0.1mm or less |
| Base | Material: Aluminum, white alumite treated |
| Allowable static moment | Ma: 6.9 N·m, Mb: 9.9 N·m, Mc: 17.0 N·m |
| Allowable dynamic moment (*) | Ma: 2.7 N·m, Mb: 3.9 N·m, Mc: 6.8 N·m |
| Allowable overhang | 120mm or less in Ma, Mb and Mc directions |
| Ambient operating temperature, humidity | 0 to 40°C, 85% RH or less (Non-condensing) |

(*) Based on 5,000km of traveling life




Dimensional Drawings

CAD drawings can be downloaded from the website. www.intelligentactuator.com

For Special Orders

Appendix P.15

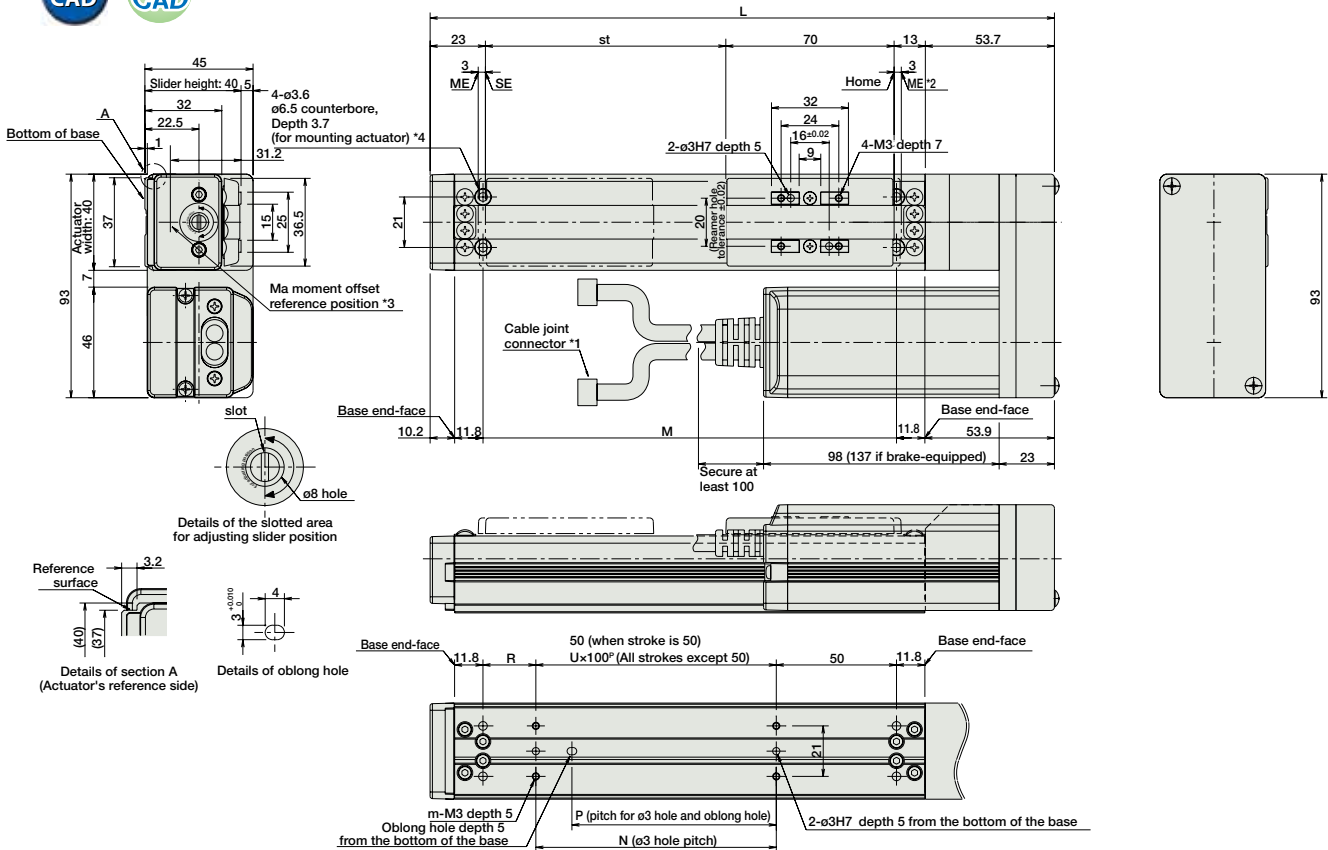

- (*1) Connect the motor and encoder cables here. See page A-59 for details on cables.
- (*2) After homing, the slider moves to the ME, therefore, please watch for any interference with surrounding objects.
ME: Mechanical end
SE: Stroke end
- (*3) Reference position for calculating the Ma moment
- (*4) If the actuator is secured using only the mounting holes provided on the top surface of the base, the base may twist to cause abnormal sliding of the slider, or may produce abnormal noise. Therefore, when using the mounting holes on the top surface of the base, keep the stroke at 200mm or less.

■ Dimensions and Mass by Stroke

* Brake-equipped models are heavier by 0.3kg.

| Stroke | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 209.7 | 259.7 | 309.7 | 359.7 | 409.7 | 459.7 | 509.7 | 559.7 |
| M | 122 | 172 | 222 | 272 | 322 | 372 | 422 | 472 |
| N | 50 | 100 | 100 | 200 | 200 | 300 | 300 | 400 |
| P | 35 | 85 | 85 | 185 | 185 | 285 | 285 | 385 |
| R | 22 | 22 | 72 | 22 | 72 | 22 | 72 | 22 |
| U | - | 1 | 1 | 2 | 2 | 3 | 3 | 4 |
| m | 4 | 4 | 4 | 6 | 6 | 8 | 8 | 10 |
| Weight (kg) | 0.8 | 0.9 | 1.0 | 1.1 | 1.2 | 1.3 | 1.4 | 1.5 |

③ Applicable Controllers

RCA series actuators can be operated with the controllers indicated below. Select the type according to your intended application.

| Name | External view | Model number | Features | Maximum number of positioning points | Input power | Power-supply capacity | Standard price | Reference page |
|---|---------------|---------------------------|---|--------------------------------------|-------------|--|----------------|----------------|
| Solenoid Valve Type | | AMEC-C-20I(I)-(III)-2-1 | Easy-to-use controller, even for beginners | 3 points | AC100V | 2.4A rated | — | → P537 |
| | | ASEP-C-20I(I)-(III)-2-0 | Simple controller operable with the same signal as a solenoid valve | | | | | → P547 |
| Solenoid valve multi-axis type PIO specification | | MSEP-C-IV-(III)-2-0 | Positioner type based on PIO control, allowing up to 8 axes to be connected | 256 points | DC24V | (Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max. | — | → P563 |
| Solenoid valve multi-axis type Network specification | | MSEP-C-IV-(V)-0-0 | Field network-ready positioner type, allowing up to 8 axes to be connected | | | | | → P631 |
| Positioner type | | ACON-C-20I(I)-(III)-2-0 | Positioning is possible for up to 512 points | 512 points | DC24V | (Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max. | — | — |
| Safety-Compliant Positioner Type | | ACON-CG-20I(I)-(III)-2-0 | | | | | | |
| Pulse Train Input Type (Differential Line Driver) | | ACON-PL-20I(I)-(III)-2-0 | Pulse train input type with differential line driver support | (—) | DC24V | (Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max. | — | → P631 |
| Pulse Train Input Type (Open Collector) | | ACON-PO-20I(I)-(III)-2-0 | Pulse train input type with open collector support | | | | | |
| Serial Communication Type | | ACON-SE-20I(I)-N-0-0 | Dedicated Serial Communication | 64 points | DC24V | (Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max. | — | — |
| Program Control Type | | ASEL-CS-1-20(I)-(III)-2-0 | Programmed operation is possible. Can operate up to 2 axes | 1,500 points | DC24V | (Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max. | — | → P675 |

* This is for the single-axis ASEL.
* (III) indicates I/O type (NP/PN).

* (I) indicates encoder type (I: incremental, A: absolute)
* (IV) indicates number of axes (1 to 8).

* Enter the code "LA" in (I) when the power-saving option is specified.
* (V) indicates field network specification symbol.

Slider Type

Mini

Standard

Controller Integrated

Rod Type

Mini

Standard

Controller Integrated

Table/Arm/Flat Type

Mini

Standard

Gripper/Rotary Type

Linear Servo Type

Clean-room Type

Splash-Proof Type

Pulse Motor

Servo Motor (24V)

Servo Motor (200V)

Linear Servo Motor