Model Specification Items

C € RoHS

RCA-RA3C

Robo Cylinder, Rod Type, ø32mm Diameter, 24V Servo Motor, Coupled

RCA - RA3C -

* See page Pre-47 for details on the model descriptions.

20 — Encoder type — Motor type 20: 20W Servo

I: Incremental

encoder is also

* The Simple absolute

considered type "I".

10: 10mm 5mm 2.5:2.5mm

Stroke

50: 50mm 200: 200mm (50mm pitch increments)

Applicable controller A1:ASEP MSEP

A3:AMEC **ASEP** MSEP

N: None P: 1m S: 3m M:5m X□□: Custom Length

Cable length

R□□: Robot Cable

Options

Power-saving

See Options below.

For High Acceleration/Deceleration



Technical References



(Unit: mm/s)

OIN Notes on selection

(1) When the stroke increases, the maximum will drop to prevent the ball screw from reaching the critical rotational speed. Use the actuator specification table below to check the maximum speed at the stroke you desire.

(2) The load capacity is based on operating the standard and power-saving models at 0.3G (0.2G for 2.5mm-lead), and 1G acceleration for the high-acceleration models (2.5mm-lead model excluded). (The values in the table below are the upper limits, even if the acceleration/deceleration is decreased.)

(3) The values for the horizontal load capacity assume the use of an external guide, so that there is no external force from any direction other than the forward/backward direction of the rod.

(4) See page A-71 for details on push motion.

Actuator Specifications

■ Leads and Payloads

Model number	Motor output (W)	Lead (mm)	Max. Load Capacity Horizontal (kg) Vertical (kg)		Rated thrust (N)	Stroke (mm)
RCA-RA3C-I-20-10-①-②-③-④		10	4.0	1.5	36.2	
RCA-RA3C-I-20-5-①-②-③-④	20	5	9.0	3.0	72.4	50~200 (every 50mm)
RCA-RA3C-I-20-2.5-①-②-③-④		2.5	18.0	6.5	144.8	

■ Stroke and Maximum Speed

Stroke Lead	50~200 (every 50mm)
10	500
5	250
2.5	125

Code explanation ① Stroke ② Applicable controller ③ Cable length ④ Options *See page A-71 for details on push motion.

①Stroke (mm)	Standard price
50	
100	
150	_
200	

① Stroke

Name	Option code	See page	Standard price				
Brake	В	→ A-42	_				
Foot bracket	FT	→ A-49	_				
Flange bracket (front)	FL	→ A-45	_				
Flange bracket (back)	FLR	→ A-46	_				
High-acceleration/deceleration (*1)	HA	→ A-50	_				
Home sensor (*2)	HS	→ A-50	_				
Power-saving (*3)	LA	→ A-52	_				
Knuckle joint	NJ	→ A-53	_				
Non-motor end specification	NM	→ A-52	_				
Trunnion bracket (front)	TRF	→ A-57	_				
Trunnion bracket (back)	TRR	→ A-58	_				

(*1) The high-acceleration/deceleration option is not available for 2.5mm-lead model.

(*2) The home sensor (HS) cannot be used on the Non-motor end models.
(*3) The high-acceleration/deceleration option and the power-saving option cannot be used simultaneously.

③ Cable Length

Туре	Cable symbol	Standard Price
	P (1m)	_
Standard	S (3m)	_
	M (5m)	ı
	X06 (6m) ~ X10 (10m)	_
Special length	X11 (11m) ~ X15 (15m)	_
	X16 (16m) ~ X20 (20m)	_
	R01 (1m) ~ R03 (3m)	_
	R04 (4m) ~ R05 (5m)	_
Robot Cable	R06 (6m) ~ R10 (10m)	_
	R11 (11m) ~ R15 (15m)	_
	R16 (16m) ~ R20 (20m)	

^{*} See page A-59 for cables for maintenance.

Actuator Specifications

ltem	Description			
Drive System	Ball screw, ø8mm, rolled C10			
Positioning Repeatability	±0.02mm			
Lost Motion	0.1mm or less			
Base	Material: Aluminum, white alumite treated			
Rod diameter	ø16mm			
Non-rotating accuracy of rod	±1.0 deg			
Ambient operating temperature, humidity	0 to 40°C, 85% RH or less (Non-condensing)			

www.intelligentactuator.com

For Special Orders








(*1) Connect the motor and encoder cables here. See page A-59 for details on cables.
(*2) After homing, the slider moves to the ME, therefore, please watch

for any interference with surrounding objects. ME : Mechanical end SE : Stroke end

(*3) The orientation of the bolt varies depending on the product.

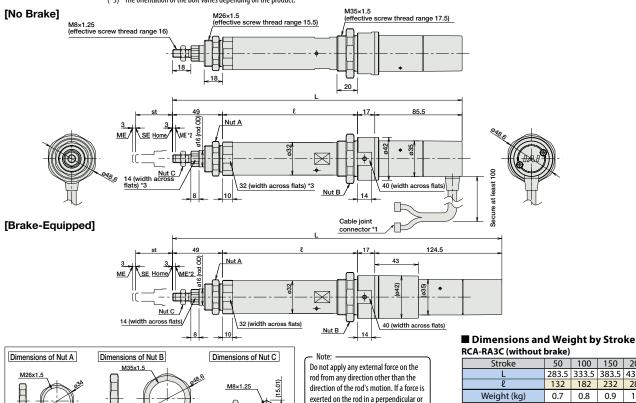

Stroke	50	100	150	200	
L	283.5	333.5	383.5	433.5	
l	132	182	232	282	
Weight (kg)	0.7	0.8	0.9	1.0	

RCA-RA3C (with brake)

Stroke	50	100	150	200			
L	322.5	372.5	422.5	472.5			
l	132	182	232	282			
Weight (kg)	0.9	1.0	1.1	1.2			

② Applicable Controllers

RCA series actuators can be operated with the controllers indicated below. Select the type according to your intended application. *ACON-CY also can be used.

rotational direction, the detent may

become damaged.

Name	External view	Model number	Features	Maximum number of positioning points	Input power	Power-supply capacity	Standard price	Reference page	
Colon sid Value Time		AMEC-C-20SI①-⑪-2-1	Easy-to-use controller, even for beginners	AC1	AC100V	2.4A rated	_	→ P537	
Solenoid Valve Type		ASEP-C-20SI①-⑪-2-0	Simple controller operable with the same signal as a solenoid valve				_	→ P547	
Solenoid valve multi-axis type PIO specification	lune"	MSEP-C2-0 Positioner type based on PIO control, allowing up to 8 axes to be connected			→ P563				
Solenoid valve multi-axis type Network specification		MSEP-C-()-~-(V)-0-0	Field network-ready positioner type, allowing up to 8 axes to be connected	256 points	5	(Standard) 1.7A rated 5.1A max. (Power-saving) 1.7A rated 3.4A max.		_	→ F503
Positioner type	I.	ACON-C-20SI①-⑪-2-0	Positioning is possible for up to 512	512 points	DC24V		_		
Safety-Compliant Positioner Type		ACON-CG-20SI()-())-2-0	points				_		
Pulse Train Input Type (Differential Line Driver)		ACON-PL-20SI①-①-2-0	Pulse train input type with differential line driver support	(—)			_	→ P631	
Pulse Train Input Type (Open Collector)	1	ACON-PO-20SI①-⑪-2-0	Pulse train input type with open collector support	64 points	(—)			_	
Serial Communication Type		ACON-SE-20SI①-N-0-0	Dedicated Serial Communication			_			
Program Control Type		ASEL-CS-1-20SI①-①-2-0	Programmed operation is possible. Can operate up to 2 axes	1,500 points			_	→ P675	

*This is for the single-axis ASEL.
* ① indicates I/O type (NP/PN).

* Enter the code "HA" or "LA" in ① when the high-acceleration/deceleration option or the power-saving option is specified.

* (1) indicates number of axes (1 to 8). (indicates field network specification symbol.

RCA-RA3C **222**