CP3-SA3R \blacksquare Configuration: RCP3 — SA3R **28P** Cable Length Encoder I: Incremental * The Simple 28P: Pulse motor 6:4mm 50: 50mm P1: PCON N: None See Options below P:1m S:3m M:5m Be sure to specify which side the motor 28 🗌 size 4:4mm **RPCON**

2:2mm



absolute encoder

models are

labeled as "I".

* See page Pre-35 for explanation of each code that make up the configuration name

Technical References

(1) Since the RCP3 series use a pulse motor, the load capacity decreases at high speeds. Check in the Speed vs. Load Capacity graph to see if your desired speed and load capacity are supported. (2) The load capacity is based on operation at an acceleration of 0.3G (0.2G for the 2mm-lead model, or when used vertically).

These values are the upper limits for the acceleration.

Speed vs. Load Capacity Due to the characteristics of the pulse motor, the RCP3 series' load capacity decreases at high speeds. In the table below, check if your desired speed and load capacity are supported.

X 🗆 : Custom Length

is to be mounted (ML/MR).

PSEL


PSEP


P3: PMEC

300: 300mm

(50mm pitch

increments)





Actuator Specifications ■ Lead and Load Capacity

Max. Load Capacity Maximum Lead Stroke RCP3-SA3R-I-28P-6-1 - 2 - 3 - 4 6 0.5 15 1

50~300 RCP3-SA3R-I-28P-4-1 - 2 - 3 - 4 4 2 1 22 (50mm RCP3-SA3R-I-28P-2-1 - 2 - 3 - 4 3 1.5 44 Legend ① Stroke ② Compatible controller ③ Cable length ④ Options

Stroke and Maximum Speed					
Stroke Lead	$50\sim300$ (50mm increments)				
6	300				
4	200				
2	100				

① Stroke List				
Chuelse (mans)	Standard Price			
Stroke (mm)	With cover (standard)	No cover (Option)		
50	_	_		
100	-	-		
150	_	_		
200	_	_		
250	-	-		
300	_	_		


3 Cable List			
Туре	Cable Symbol	Standard Price	
Standard	P (1m)	_	
	S (3m)	-	
(Robot Cables)	M (5m)	-	
	X06 (6m) ~ X10 (10m)	_	
Special Lengths	X11 (11m) ~ X15 (15m)	-	
	X16 (16m) ~ X20 (20m)	_	

* The standard cable is the motor-encoder integrated robot cable.

* See page A-39 for cables for maintenance.


④ Option List					
Name	Option Code	See Page	Standard Price		
Brake-Equipped	В	→ A-25	_		
Cable Exit Direction (Top)	CJT	→ A-25	_		
Cable Exit Direction (Outside)	CJO	→ A-25	_		
Cable Exit Direction (Bottom)	CJB	→ A-25	_		
Left-Mounted Motor (Standard)	ML	→ A-33	_		
Right-Mounted Motor	MR	→ A-33	_		
No Cover	NCO	→ A-33	_		
Reversed-home	NM	→ A-33	_		

Actuator Specifications					
Item	Description				
Drive System	Ball screw Ø6mm C10 grade				
Positioning Repeatability	±0.02mm				
Lost Motion	0.1mm or less				
Base	Material: Aluminum (special alumite treated)				
Allowable Static Load Moment	Ma: 5.0N·m Mb: 7.1N·m Mc: 7.9N·m				
Allowable Dynamic Load Moment	Ma: 1.96N·m Mb: 2.84N·m Mc: 3.14N·m				
Overhang Load Length	100mm or less				
Ambient Operating Temp./Humidity	0~40°C, 85% RH or less (non-condensing)				







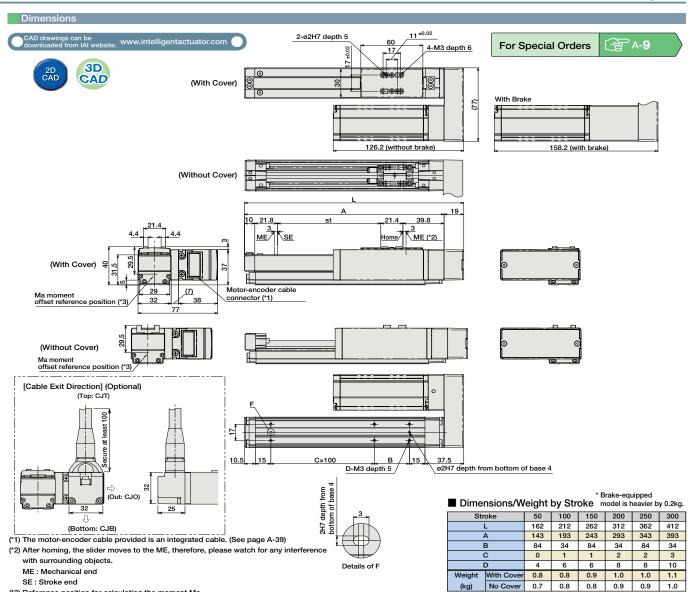

② Compatible	Controllers

(*3) Reference position for calculating the moment Ma

The RCP3 series actuators can operate with the controllers below. Select the controller according to your usage.

Name	External View	Model	Description	Max. Positioning Points	Input Voltage	Power Supply Capacity	Standard Price	See Page	
Solenoid Valve Type		PMEC-C-28PI-NP-2-①	Easy-to-use controller, even for beginners		AC100V AC200V	See P481	-	→ P477	
Sciencia valve type	PSEP-C-28PI-NP-2-0	PSEP-C-28PI-NP-2-0	Operable with same signal as solenoid valve. Supports both single and double solenoid types.	3 points		_	-	- → P487	
Splash-Proof Solenoid Valve Type		PSEP-CW-28PI-NP-2-0	No homing necessary with simple absolute type.				-		
Positioner Type	pe er)	PCON-C-28PI-NP-2-0	Positioning is possible for up to 512	512 points				-	
Safety-Compliant Positioner Type		PCON-CG-28PI-NP-2-0	points	512 points		2A Max.	-	→ P525	
Pulse Train Input Type (Differential Line Driver)		PCON-PL-28PI-NP-2-0	Pulse train input type with differential line driver support	(-)	DC24V		-		
Pulse Train Input Type (Open Collector)		PCON-PO-28PI-NP-2-0	Pulse train input type with open collector support		(-)		-		
Serial Communication Type		PCON-SE-28PI-N-0-0	Dedicated to serial communication	64 points			-		
Field Network Type		RPCON-28P	Dedicated to field network	768 points			-	→ P503	
Program Control Type		PSEL-C-1-28PI-NP-2-0	Programmed operation is possible Can operate up to 2 axes	1500 points				-	→ P557

^{*} This is for the single-axis PSEL. * 1 is a placeholder for the power supply voltage (1: 100V / 2: 100 \sim 240V).