
CP2-RGS4C ROBO Cylinder Rod Type with Single Guide 45mm Width Pulse Motor Straight Type  $\blacksquare$  Configuration: RCP2 - RGS4C **42P** Encoder Motor Compatible Controller Cable Length Option N : None P : 1m S : 3m M : 5m B : Brake FT : Foot bracket NM: Reversed-home I: Incremental \* The Simple 42P: Pulse motor 10:10mm 50: 50mm P1: PCON 42 🗌 size 5:5mm **RPCON** absolute encoder PSEL 2.5 : 2.5mm 300: 300mm is also considered (50mm pitch P3: PMEC X : Custom
R : Robot cable increments) PSEP \* See page Pre-35 for an explanation of the naming convention.

Technical P. A-5 References

Speed vs. Load Capacity Due to the characteristics of the pulse motor, the RCP2 series' load capacity decreases at high speeds. In the table below, check if your desired speed and load capacity are supported.

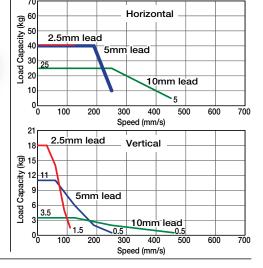

- (1) When the stroke increases, the maximum speed will drop to prevent the ball screw from reaching the critical rotational speed. Use the actuator specification table below to check the maximum speed at the stroke you desire.
- Since the RCP2 series use a pulse motor, the load capacity decreases at high speeds.
  Check in the Speed vs. Load Capacity graph to see if your desired speed and load capacity are supported.
- The load capacity is based on operation at an acceleration of 0.2G. 0.2G is the upper limit of the acceleration. In addition, the horizontal load capacity is based on the use of an external guide. See the technical resources (page A-82) for the allowable weight using the supplied guide alone.

Actuator Specifications										
■ Lead and Load Capacity (Note 1) Please note that the maximum load capacity decreases as the speed increases. ■ Stroke and Maximum Speed										
	Model	Lead (mm)	Max. Load Ca Horizontal (kg)	pacity (Note 1) Vertical (kg)	Maximum Push Force (N)(Note 2)	Stroke (mm)	Stroke Lead	50 ~ 200 (50mm increments)	250 (mm)	300 (mm)
RCP2-R	GS4C-I-42P-10-①-②-③-④	10	~ 25	~ 3.5	150	50 ~ 300 (50mm	10	458	458	350
RCP2-R	GS4C-I-42P-5-①-②-③-④	5	~ 40	~ 11	284		5	250	237	175
RCP2-R	GS4C-I-42P-2.5-①-②-③-④	2.5	40	~ 18	358	c.c.nenta)	2.5	125 <114>	118 <114>	87
Legend: Stroke Compatible controller Cable length Options (Note 2) See page A-69 for the pushing force graphs. *The values enclosed in < > apply for vertical usage. (Unit: mm/s)										

① Stroke List						
Stroke (mm)	Standard Price					
50	-					
100	-					
150	-					
200	-					
250	-					
300	-					

3 Cable List							
Type	Cable Symbol	Standard Price					
	P (1m)	_					
Standard	<b>S</b> (3m)	-					
	<b>M</b> (5m)	-					
	X06 (6m) ~ X10 (10m)	-					
Special Lengths	X11 (11m) ~ X15 (15m)	-					
	X16 (16m) ~ X20 (20m)	-					
	R01 (1m) ~ R03 (3m)	_					
	R04 (4m) ~ R05 (5m)	-					
Robot Cable	R06 (6m) ~ R10 (10m)	-					
	R11 (11m) ~ R15 (15m)	_					
	R16 (16m) ~ R20 (20m)	_					
* Soo page A-30 for cables for maintenance							

See page A-39 for cables for maintenance.

4 Option List			
Name	Option Code	See Page	Standard Price
Brake	В	→ A-25	-
Foot bracket	FT	→ A-29	-
Reversed-home	NM	→ <b>A-33</b>	_

Item	Description
Drive System	Ball screw ø8mm C10 grade
Positioning Repeatability	±0.02mm
Lost Motion	0.1mm or less
Guide	Single guide Guide rod diameter ø10mm Ball bush type
Rod Diameter	ø22mm
Non-rotating accuracy of rod	±0.05 deg
Ambient Operating Temp./Humidity	0 ~ 40°C, 85% RH or less (non-condensing)

Dimensions

CAD drawings can be downloaded from IAI website. www.intelligentactuator.com

For Special Orders











- \*1. The motor-encoder cable is connected here. See page A-39 for details on cables
- When homing, the rod moves to the M.E.; therefore, please watch for any interference with the surrounding objects. ME: Mechanical end SE: Stroke end
  The values enclosed in "( )" are reference dimensions.


\*3. Please note that there is no T-slot on the bottom of the brake unit.

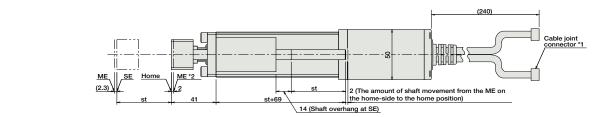

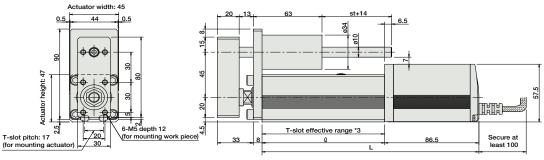







\* Compared to the standard model, the brake-equipped model is longer by 58mm and heavier by 0.4kg.

## ■ Dimensions/Weight by Stroke

Stroke	50	100	150	200	250	300				
l	112.5	162.5	212.5	262.5	312.5	362.5				
L	199	249	299	349	399	449				
Weight (kg)	1.8	2.1	2.4	2.7	2.9	3.2				

## ② Compatible Controllers

The RCP2 series actuators can operate with the controllers below. Select the controller according to your usage

Name	External View	Model	Description	Max. Positioning Points	Input Voltage	Power Supply Capacity	Standard Price	See Page
Solenoid Valve Type	113	PMEC-C-42PI-NP-2-①	Easy-to-use controller, even for beginners		AC100V AC200V	See P481	-	→ P477
		PSEP-C-42PI-NP-2-0	Operable with same signal as solenoid valve. Supports both single and double solenoid types.	3 points	DC24V	2A max.	-	→ P487
Splash-Proof Solenoid Valve Type	1	PSEP-CW-42PI-NP-2-0	No homing necessary with simple absolute type.				-	
Positioner Type	I.	PCON-C-42PI-NP-2-0	Positioning is possible for up to 512 points	512 points			-	
Safety-Compliant Positioner Type		PCON-CG-42PI-NP-2-0	To Statisting is possible for up to 512 points				-	
Pulse Train Input Type (Differential Line Driver)	ei e	PCON-PL-42PI-NP-2-0	Pulse train input type with differential line driver support	(-)			-	→ P525
Pulse Train Input Type (Open Collector)		PCON-PO-42PI-NP-2-0	Pulse train input type with open collector support				-	
Serial Communication Type		PCON-SE-42PI-N-0-0	Dedicated to serial communication	64 points			-	
Field Network Type		RPCON-42P	Dedicated to field network	768 points			-	→ P503
Program Control Type		PSEL-C-1-42PI-NP-2-0	Programmed operation is possible Operation is possible on up to 2 axes	1500 points			-	→ P557

\* This is for the single-axis PSEL.

\* ① is a placeholder for the power supply voltage (1: 100V, or 2: 100~240V).

RCP2-RGS4C