

# RCA2-TA6C


Robo Cylinder, Table Type, Actuator Width 65mm, Servo Motor, Coupled

Model Specification Items	<b>RCA2</b> — <b>TA6C</b> — <b>I</b> — <b>20</b> — <input type="checkbox"/> — <input type="checkbox"/> — <input type="checkbox"/> — <input type="checkbox"/> — <input type="checkbox"/>	Series — Type — Encoder type — Motor type — Lead — Stroke — Applicable controller — Cable length — Options
	I: Incremental * The Simple absolute encoder is also considered type "I".	20: 20W Servo motor 12: 12mm 6: 6mm 3: 3mm 25: 25mm 150: 150mm (25mm pitch increments) A1: ACON ASEL A3: AMEC ASEP MSEP N: None P: 1m S: 3m M: 5m X <input type="checkbox"/> <input type="checkbox"/> : Custom Length See options below.

\* See page Pre-47 for details on the model descriptions.



Power-saving

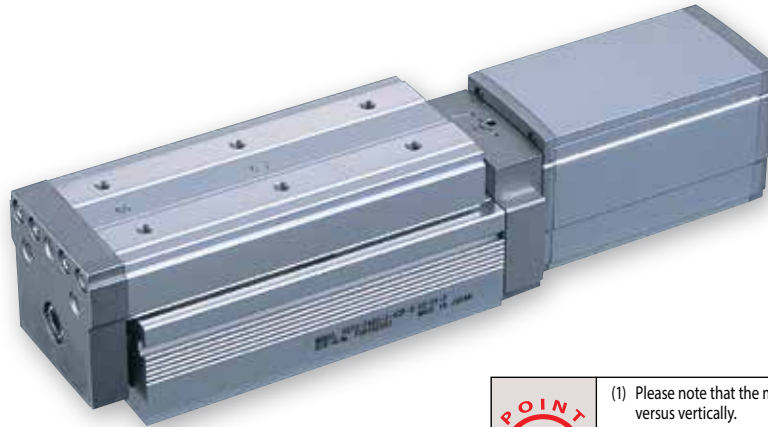

Technical References Appendix P.5

- POINT** Notes on selection
- Please note that the maximum speed is different when used horizontally versus vertically.
  - The load capacity is based on operation at an acceleration of 0.3G (0.2G for the 3mm-lead model, or when used vertically.) This is the upper limit of the acceleration.
  - See page A-71 for details on push motion.

## Actuator Specifications

### Leads and Payloads

Model number	Motor output (W)	Lead (mm)	Max. Load Capacity		Rated thrust (N)	Stroke (mm)
			Horizontal (kg)	Vertical (kg)		
RCA2-TA6C-I-20-12-①-②-③-④	20	12	2	0.5	17	25~150 (every 25mm)
RCA2-TA6C-I-20-6-①-②-③-④		6	4	1.5	34	
RCA2-TA6C-I-20-3-①-②-③-④		3	6	3	68	

### Stroke and Maximum Speed

Stroke / Lead	25~150 (every 25mm)
	12
6	300
3	150

Code explanation ① Stroke ② Applicable Controller ③ Cable length ④ Options \*See page A-71 for details on push motion. \*The values enclosed in < > apply to vertical settings. (Unit: mm/s)

### ① Stroke

① Stroke (mm)	Standard price
25	—
50	—
75	—
100	—
125	—
150	—

### ③ Cable Length

Type	Cable symbol	Standard price
Standard (Robot Cables)	P (1m)	—
	S (3m)	—
	M (5m)	—
Special length	X06 (6m) ~ X10 (10m)	—
	X11 (11m) ~ X15 (15m)	—
	X16 (16m) ~ X20 (20m)	—

\*The standard cable for the RCA2 is the robot cable.  
\* See page A-59 for cables for maintenance.

### ④ Options


Name	Option code	See page	Standard price
Brake	B	→ A-42	—
Cable exit direction (top)	CJT	→ A-42	—
Cable exit direction (right)	CJR	→ A-42	—
Cable exit direction (left)	CJL	→ A-42	—
Cable exit direction (bottom)	CJB	→ A-42	—
Power-saving specification	LA	→ A-52	—
Non-motor end specification	NM	→ A-52	—

### Actuator Specifications

Item	Description
Drive System	Ball screw, ø10mm, rolled C10
Positioning Repeatability	±0.02mm
Lost Motion	0.1mm or less
Base	Material: Aluminum, special alumite treated
Allowable static moment	Ma: 29.4 N·m, Mb: 42.0 N·m, Mc: 74.1 N·m
Allowable dynamic moment (*)	Ma: 7.26 N·m, Mb: 10.3 N·m, Mc: 18.25 N·m
Overhang load length	Within the load moment range
Ambient operating temperature, humidity	0 to 40°C, 85% RH or less (Non-condensing)

(\*) Based on 5,000km of traveling life

Directions of allowable load moments




Dimensional Drawings

CAD drawings can be downloaded from the website. [www.intelligentactuator.com](http://www.intelligentactuator.com)



For Special Orders Appendix P.15

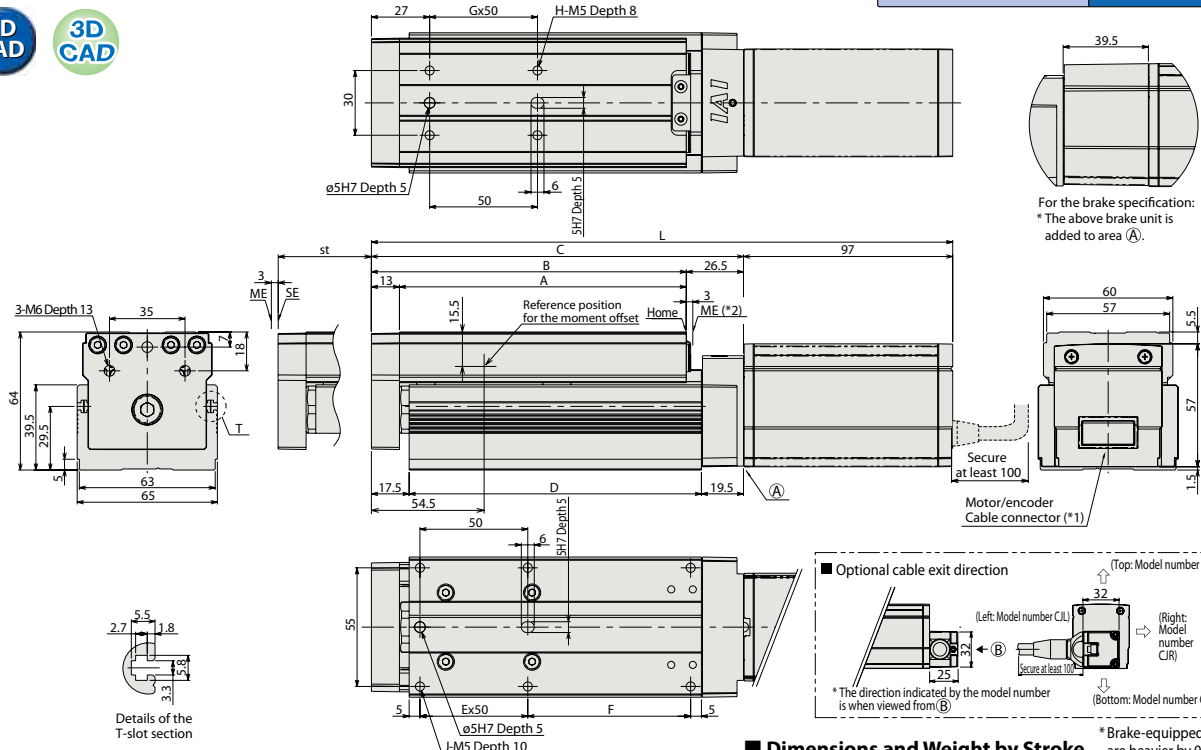

(\*1) Connect the motor-encoder integrated cable here. See page A-59 for details on cables.  
 (\*2) After homing, the slider moves to the ME, therefore, please watch for any interference with surrounding objects.  
 ME : Mechanical end SE : Stroke end

■ Dimensions and Weight by Stroke

L	Stroke	25	50	75	100	125	150
	Without brake	244.5	269.5	294.5	319.5	344.5	369.5
With brake	284	309	334	359	384	409	
A	108	133	158	183	208	233	
B	121	146	171	196	221	246	
C	147.5	172.5	197.5	222.5	247.5	272.5	
D	110.5	135.5	160.5	185.5	210.5	235.5	
E	1	1	2	2	3	3	
F	50.5	75.5	50.5	75.5	50.5	75.5	
G	1	1	2	2	3	3	
H	4	4	6	6	8	8	
J	6	6	8	8	10	10	
Weight (kg)	1.8	2	2.2	2.4	2.6	2.8	

② Applicable Controllers

RCA2 series actuators can be operated with the controllers indicated below. Select the type according to your intended application. \* ACON-CY also can be used.

Name	External view	Model number	Features	Maximum number of positioning points	Input power	Power-supply capacity	Standard price	Reference page
Solenoid Valve Type		AMEC-C-20I-①-②-2-1	Easy-to-use controller, even for beginners	3 points	AC100V	2.4A rated	—	→ P537
		ASEP-C-20I-①-②-2-0	Simple controller operable with the same signal as a solenoid valve					→ P547
Solenoid valve multi-axis type PIO specification		MSEP-C-③-④-⑤-2-0	Positioner type based on PIO control, allowing up to 8 axes to be connected	256 points	DC24V	(Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max.	—	→ P563
Solenoid valve multi-axis type Network specification		MSEP-C-③-④-⑤-0-0	Field network-ready positioner type, allowing up to 8 axes to be connected					
Positioner type		ACON-C-20I-①-②-2-0	Positioning is possible for up to 512 points	512 points	DC24V	(Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max.	—	—
Safety-Compliant Positioner Type		ACON-CG-20I-①-④-2-0						
Pulse Train Input Type (Differential Line Driver)		ACON-PL-20I-①-②-2-0	Pulse train input type with differential line driver support	—	DC24V	(Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max.	—	→ P631
Pulse Train Input Type (Open Collector)		ACON-PO-20I-①-②-2-0	Pulse train input type with open collector support					
Serial Communication Type		ACON-SE-20I-①-N-0-0	Dedicated Serial Communication	64 points	DC24V	(Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max.	—	—
Program Control Type		ASEL-CS-1-20I-①-②-2-0	Programmed operation is possible. Can operate up to 2 axes	1,500 points	DC24V	(Standard) 1.3A rated 4.4A max. (Power-saving) 1.3A rated 2.5A max.	—	→ P675

\* This is for the single-axis ASEL. \* Enter the code "LA" in ① when the power-saving specification is specified. \* ① indicates I/O type (NP/PN). \* ③ indicates number of axes (1 to 8). \* ④ indicates field network specification symbol.

- Slider Type
- Mini
- Standard
- Controllers Integrated
- Rod Type
- Mini
- Standard
- Controllers Integrated
- Table/ Arm/ Flat Type
- Mini
- Standard
- Gripper/ Rotary Type
- Linear Servo Type
- Clean-room Type
- Splash-Proof Type
- Pulse Motor
- Servo Motor (24V)
- Servo Motor (200V)
- Linear Servo Motor