

Large Diameter Hollow Rotary RCS2-RTC



www.intelligentactuator.com

SIGNIFICANT INCREASE IN ACCURACY/SPEED/TORQUE Adoption of the hollow structure provides a large diameter hollow rotary series with improved usability




5. No Return to Home

Homing is not required with the absolute encoder type. In the case of an emergency stop, work can resume from the last stopped position.


6. Internal Brake (Optional)

Since the brake specification can be selected, the actuator can be powered off but still hold position of the table during an emergency stop.

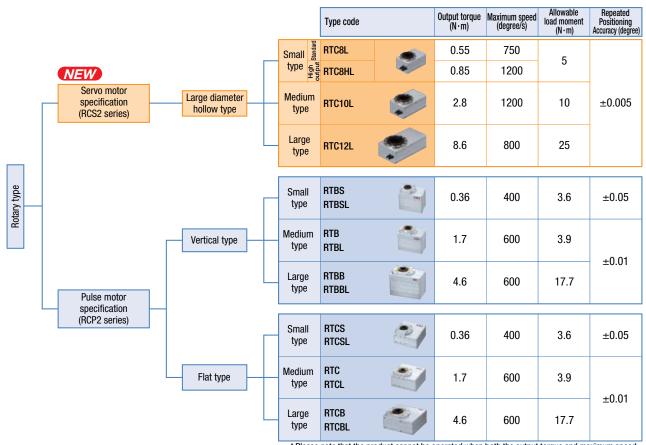

* Please note that the product cannot be operated when both the output torque and maximum speed values are simultaneously at the settings given in the above table.

Туре

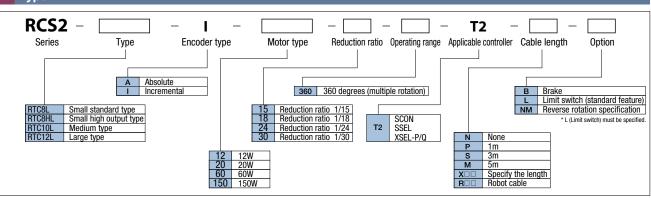

Туре


Type			
	Туре	Model	Standard price
Small	Absolute type	RCS2-RTC8L-A-12-24-360-T2	
standard type	Incremental type	RCS2-RTC8L-I-12-24-360-T2	—
Small	Absolute type	RCS2-RTC8HL-A-20-15(24)-360-T2	—
high output type	Incremental type	RCS2-RTC8HL-I-20-15(24)-360-T2	—
Modium tuno	Absolute type	RCS2-RTC10L-A-60-15(24)-360-T2	—
Medium type	Incremental type	RCS2-RTC10L-I-60-15(24)-360-T2	—
Large type	Absolute type	RCS2-RTC12L-A-150-18(30)-360-T2	
	Incremental type	RCS2-RTC12L-I-150-18(30)-360-T2	—


* The value in the brackets shows an alternative reduction ratio that can be selected.


Actuator option				
Name	Option code	Standard price		
Brake	В	_		
Limit switch (standard feature)	L	Free of cost		
Reverse rotation specification	NM	Free of cost		

Cable

Name	Cable symbol	Standard price
a	P (1m)	_
Standard	S (3m)	_
type	M (5m)	_
Crasial	X06(6m)~X10(10m)	—
Special length	X11(11m)~X15(15m)	_
lengui	X16(16m)~X20(20m)	—
	R01(1m)~R03(3m)	_
Bobot	R04(4m)~R05(5m)	_
cable	R06(6m)~R10(10m)	_
	R11(11m)~R15(15m)	—
	R16(16m)~R20(20m)	_

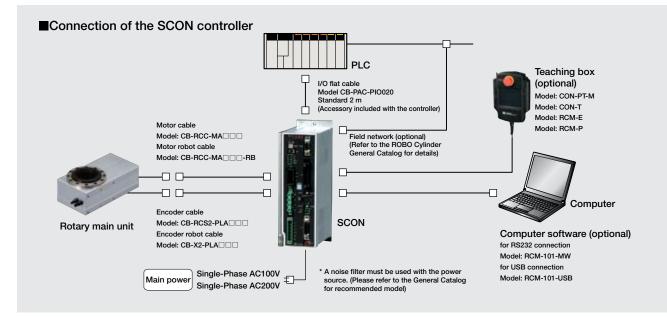

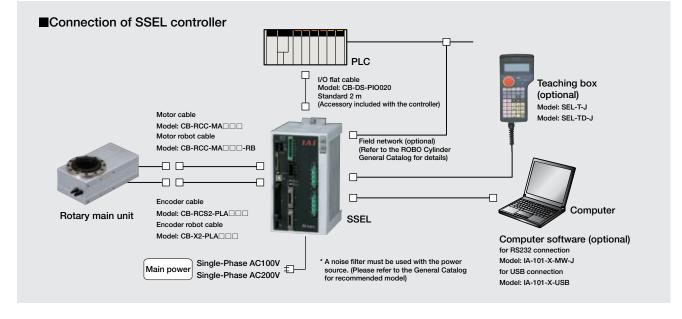

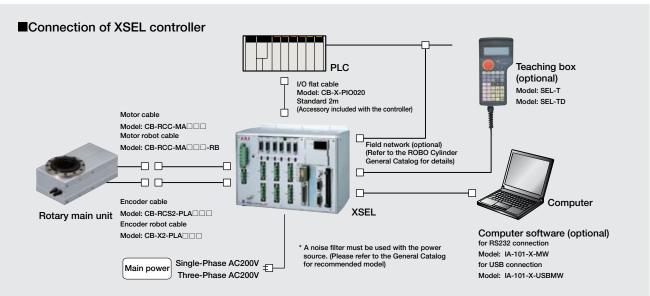

Specification								
Name of type		Small standard type	Small high output type		Medium type		Large type	
Model		RTC8L	RTC8HL		RTC10L		RTC12L	
Speed reduction ratio		1/24	1/15	1/24	1/15	1/24	1/18	1/30
Operating range	Degree			±360	(Note 1)			
Motor output	W	12	2	20	6	60	1	50
Output torque	N∙m	0.55	0.53	0.85	1.7	2.8	5.2	8.6
Maximum operation speed	Degree/s	750	1200	750	1200	750	800	600
Positioning repeatability	Degree	±0.005						
Backlash	Degree	±0.05 or lower						
Allowable inertial moment	kg∙m²	0.011	0.01	0.017	0.033	0.054	0.1	0.17
Allowable thrust load	N	400		600		800		
Allowable load moment	N∙m	5		10		25		
Home detection method		Optical encoder (Incremental type/Absolute type)						
Origin point detection method		Proximity sensor method						
Brake retention torque	N∙m	0.42		0.45		1.0		
Operational environment		Temperature 0 - 40°C, humidity 20 to 85%RH or less (no condensation)						
Inside diameter of hollow shaft	mm	ø30		ø40		ø54		
Outer dimensions of the main body (W×L×H)	mm	85×135×77 85×150×77		99×171×86		123×233×92		
Weight of the main body	kg	2.3 2.4		3.5		6.5		

(Note 1) Operation range is up to \pm 9999 degrees.

Applicable Controller


Name	Model	Standard price
Positioner type (Absolute)	SCON-C- A-NP-2-	—
Positioner type (Incremental)	SCON-C-□I-NP-2-□	—
Program control, 1 axis type (Absolute)	SSEL-C-1-□A-NP-2-□	_
Program control, 1 axis type (Incremental)	SSEL-C-1-□I-NP-2-□	—
Program control, multi-axis type (Absolute)	XSEL	Contact us
Program control, multi-axis type (Incremental)	XSELI-N1-EEE-2-	Gontact us


* Controller models vary according to the motor output of the rotary and the model/power-supply voltage of the controller. Please refer to the Controller page in the ROBO Cylinder General Catalog for details.

	on	

Supported controllers		Feature	Model	Standard price
		Easy operation type provided with a touch panel	CON-PT-M	—
For position controller	Teaching box	IP54-complient standard type	CON-T	—
(PCON, ACON, SCON,	reaching box	Affordable basic type	RCM-E	—
ROBONET, PSEP,		Solely dedicated to data entry with no movement feature	RCM-P	—
ASEP, ERC2)	Computer software	RS232C connection type	RCM-101-MW	—
	computer software	USB port connection type	RCM-101-USB	—
	Teaching box	IP54-compliant standard type (for XSEL controller)	SEL-T	—
		IP54-compliant standard type (for PSEL/ASEL/SSEL controller)	SEL-T-J	—
		3-Position Enable Switch type (for XSEL controller)	SEL-TD	_
For program controller		3-Position Enable Switch type (for PSEL/ASEL/SSEL controller)	SEL-TD-J	—
(PSEL,ASEL,SSEL, XSEL)	Computer software	RS232C connection type(for XSEL controller)	IA-101-X-MW	_
		RS232C connection type (for PSEL/ASEL/SSEL controller)	IA-101-X-MW-J	—
		USB port connection type(for PSEL/ASEL/SSEL controller)	IA-101-X-USB	_
		USB port connection type with an emergency stop switch (for XSEL controller)	IA-101-X-USBMW	_


■Small type

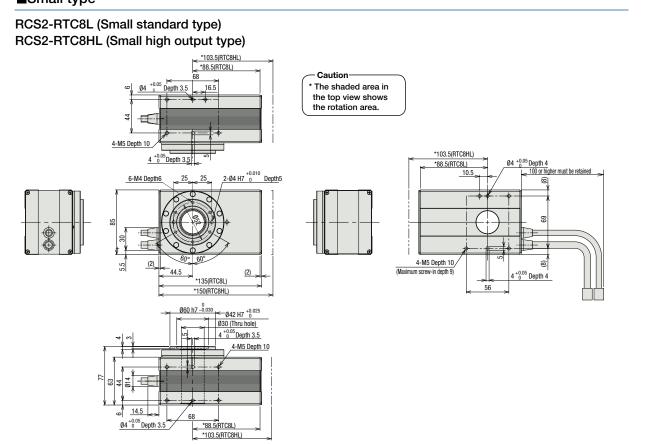

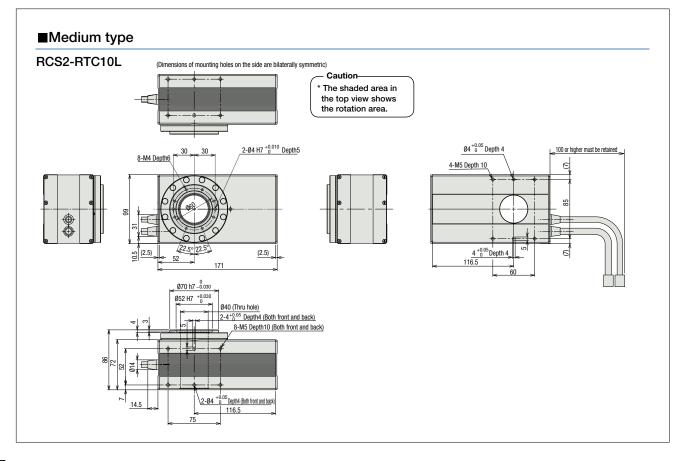

Large type

RCS2-RTC12L

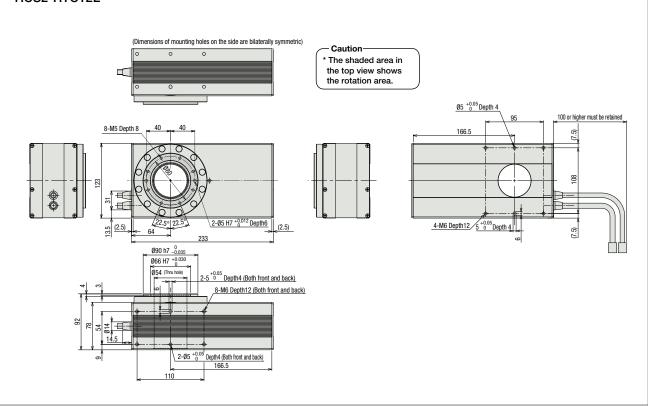

Precautions for Use

Carrier Load

■Guidelines for Offset Distance

The more the work part's center of gravity separates from the center of the rotary shaft, the more it vibrates. Design the tool with reference to the following table.

Model	Offset distance (m)
RTC8L	0.10
RTC8HL	0.12
RTC10L	0.15
RTC12L	0.20

Please refer to the Specification Sheet for the values and details of the specifications.

Acceleration

- · Please set between 0.1 and 0.3G.
- Speed
- \cdot Maximum speed that the actuator can achieve is shown.
- It depends on the operational conditions (acceleration, operational range)
- Operational range
- \cdot Please note that the operational range can vary with the speed reduction ratio.
- Torque
- The torque specified on the specification is rated torque. Up to three times the torque may be reached momentarily.
- Allowable load

There are three items as shown below.


- Values over the specified load may shorten the product lifetime or cause damage. Loads must be set at the allowable value or lower.
- · Allowable inertial moment
- Allowable thrust load
- · Allowable load moment

Brake


- The brake is provided for retention purposes. It should not be used for braking or emergency stop purposes.
- Use the brake switch on the controller to manually unlock the brake.
- There is no brake unlock switch on the robot side.
- ※ Allowable inertia and allowable brake torque do not function simultaneously. You must check the retention torque.

Others

- There is a 1mm gap between the output shaft (rotational component) and the cylinder (fixed component). (See the diagram below)
- Please prevent foreign matter from getting into the unit as this may cause trouble or malfunction.

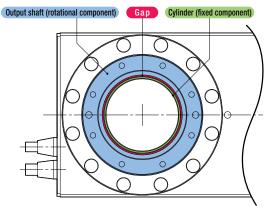

Guidelines for selecting model: Please refer to the following figures to select the model according to the shape and mass of the objects mounted on the output shaft.

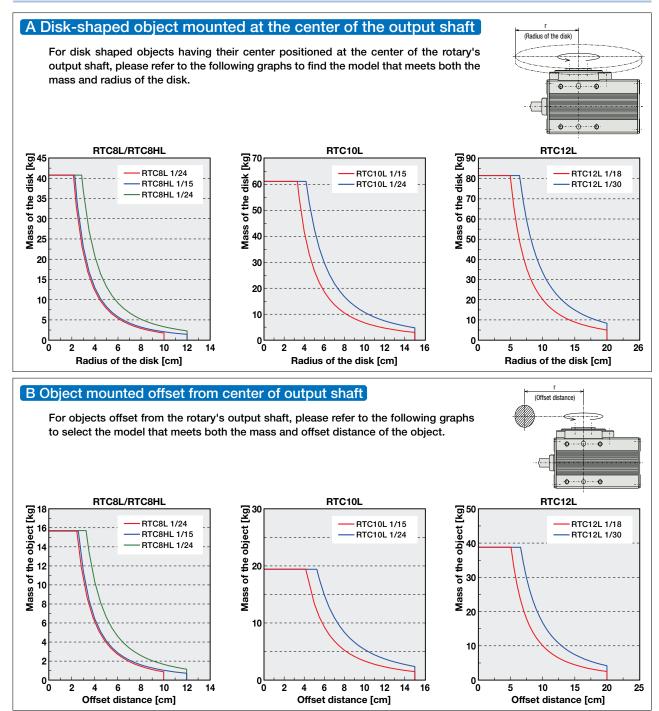

*When using a rotation shaft in the horizontal direction, gravitational loading torque is generated when an object's center of the gravity is located away from the center of rotation. Either decrease the rotational velocity or reduce the mounted weight.



IAIAmerica, Inc. Head Office 2690W 237th Street Torrance CA 90505 Chicago Office 1261 Hamilton Parkway Itasca, IL 60143 Atlanta Office: 1220 Kennestone Circle Suite 108, Marietta, GA 30066

e Suite 108, Marietta, GA 30066

IAI (Shanghaı) Co., Ltd. SHANGHAI JIAHUA BUSINESS CENTER A8404.808 Hongqiao Rd. shanghai 200030, China IAI Industrieroboter GmbH Ober der Röth 4, D-65824 Schwalbach am Taunus, Germany

